

NOTES:


- $\triangle 1$ . INCLUDES RECESSED SET SCREW OPTION.
- $\triangle 2$ . LENS MAY MOVE MORE THAN INDICATED UNTIL IT REACHES BUILT-IN STOPS.
- 3. INCLUDES REMOVEABLE ADAPTER TO USE FOR 2-3X MAGNIFICATION RANGE.

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE FOR REFERENCE ONLY. FOR DETAILED SPECIFICATIONS, PLEASE REFER TO THE SPEC SHEET.



TITLE	1.0X - 3.0X VariMagTL™ Telecentric Lens		
DWG NO	88387		
			SHEET 1 OF 2

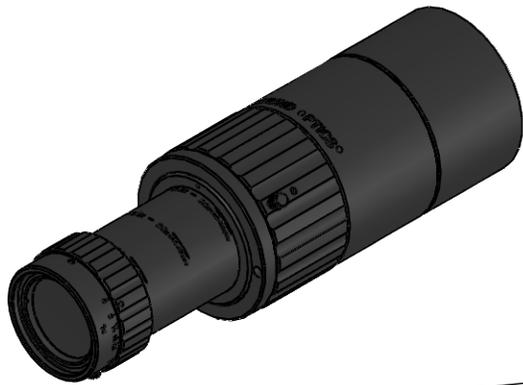

153.69mm OVERALL LENGTH @ MIN WORKING DISTANCE  $\triangle 2$   
 [6.051in]


30.75mm  
 [1.211in]

4mm  
 [.157in]

ADAPTER (INCLUDED WITH 88387)

56.24mm  $\triangle 2$   
 [2.214in]

1"-32  
 C-MOUNT

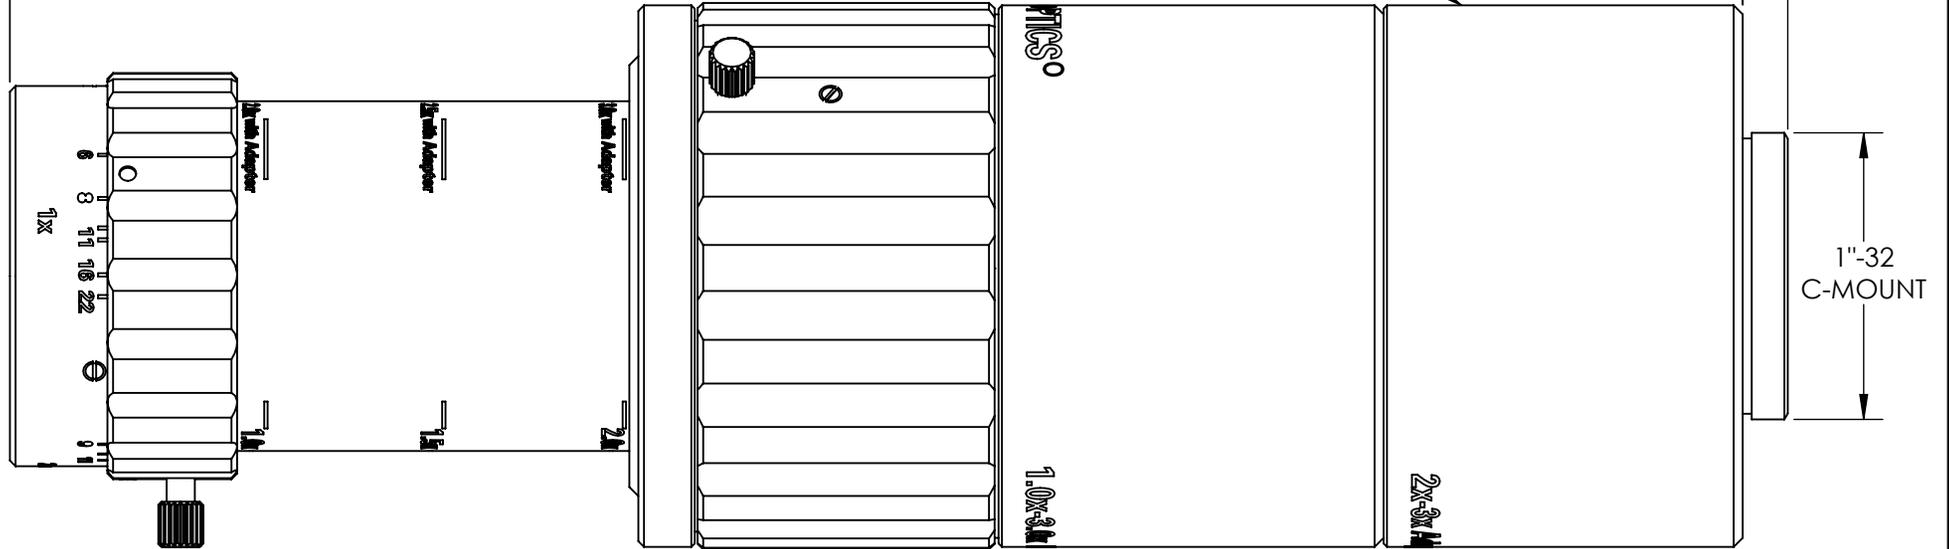

**FOR INFORMATION ONLY:**  
**DO NOT MANUFACTURE**  
**PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE  
 WITHOUT NOTICE.  
 DIMENSIONS ARE FOR REFERENCE ONLY.  
 FOR DETAILED SPECIFICATIONS,  
 PLEASE REFER TO THE SPEC SHEET.

**EO**® Edmund Optics®

TITLE	1.0X - 3.0X VariMagTL™ Telecentric Lens		
DWG NO	88387		
			SHEET 2 OF 2

Enable 3D View