
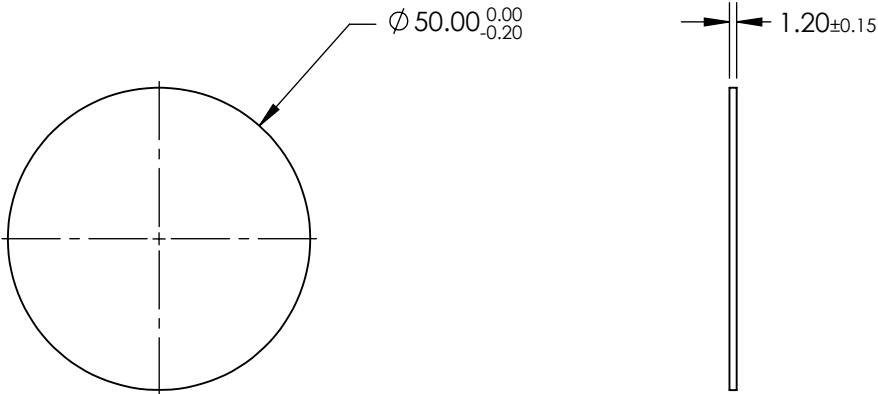


NOTES:

- 1. SUBSTRATE: BOROFLOAT
- 2. COATING (APPLY ACROSS COATING APERTURE)
 - S1: Tavg <0.5% @ 350 - 835nm
 - Tavg >85% @ 880 - 1700 nm
 - Tavg >75% @ 1700 - 2500nm
 - S2: NONE
- 3. ROHS COMPLIANT

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY



	S1	S2	THIRD ANGLE PROJECTION 		TITLE	Ø50mm, 850nm, CUT-ON SWIR LONGPASS FILTER	
SURFACE QUALITY	80-50	80-50	ALL DIMS IN	mm	DWG NO	86451	SHEET 1 OF 1