



FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING



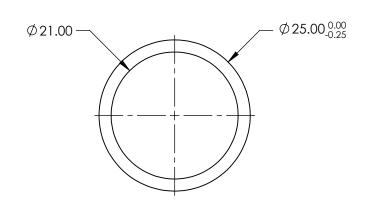





	VALUE		
OPTICAL DENSITY	≥4.0		
CENTER WAVELENGTH (CWL)	560 +3.0/-1.0 nm		
FULL WIDTH HALF MAX (FWHM)	10 ±2 nm		
MINIMUM TRANSMISSION	um transmission >55 %		
BLOCKING	200 - Far IR		
SURFACE QUALITY	80-50		
CONSTRUCTION	TRUCTION MOUNTED IN BLACK ANODIZED RING		
COATING TYPE	TRADITIONAL COATED		

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

80	®	Edmund	Optics®

THIRD ANGLE PROJECTION		TITLE	Ø25mm, 560nm x 10nm, MOUNTED BANDPASS FILTER	
ALL DIMS IN	mm	DWG NO	67833	SHEET 1 OF 1