


FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

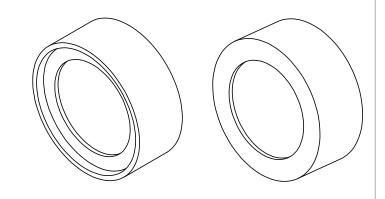



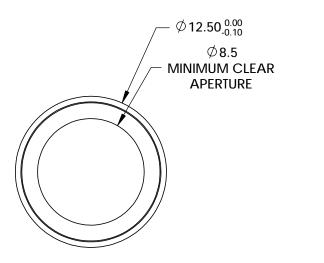

-5.00_{±0.10}

D	Λ	N	חו	П	Λ	C	c	г	ш	т		ח	
n	н	1		Р	Д	. ٦	•	_	и		П	к	

REV. 001	VALUE				
CENTER WAVELENGTH (CWL)	355 ± 2nm				
FULL WIDTH HALF MAX (FWHM)	10 ± 2nm				
MINIMUM TRANSMISSION	≥85				
BLOCKING	200 - 1200nm				
SURFACE QUALITY	80-50				
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING				
COATING TYPE	HARD COATED				
DURABILITY	MIL-C-48497A, SECT. 3.4.1				
ENVIRONMENTAL	MIL-STD-801F, SECT. 507.4				

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

		B	Edmund Optic	S [®]		
THIRD ANGLE PROJECTION		TITLE	OD4, Ø12.5mm, 355nm x 10nm, HC, BP FILTER			
ALL DIMS IN	mm	DWG NO	34490	SHEET 1 OF 1		