



NOTES:

1. SUBSTRATE: Float Glass
2. COATING (APPLY ACROSS CLEAR APERTURE)
  - S1: Protected Silver (450-10000nm)
  - R(AVG) >98% @ 450 - 800nm
  - R(AVG) >98.5% @ 2000 - 10,000nm

S2: NONE

3. EDGES SEAMED

4. ROHS COMPLIANT

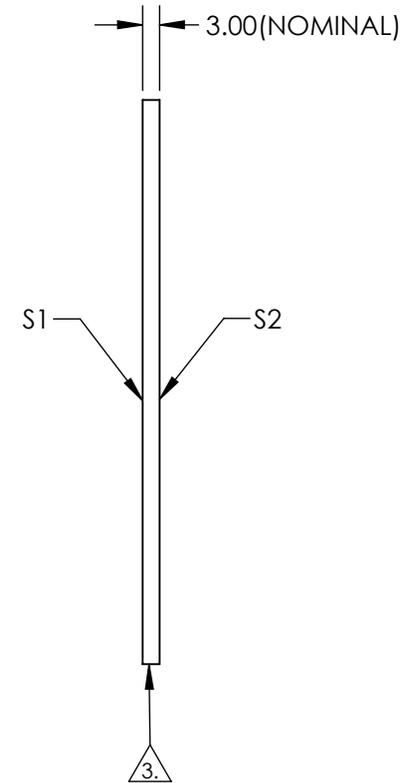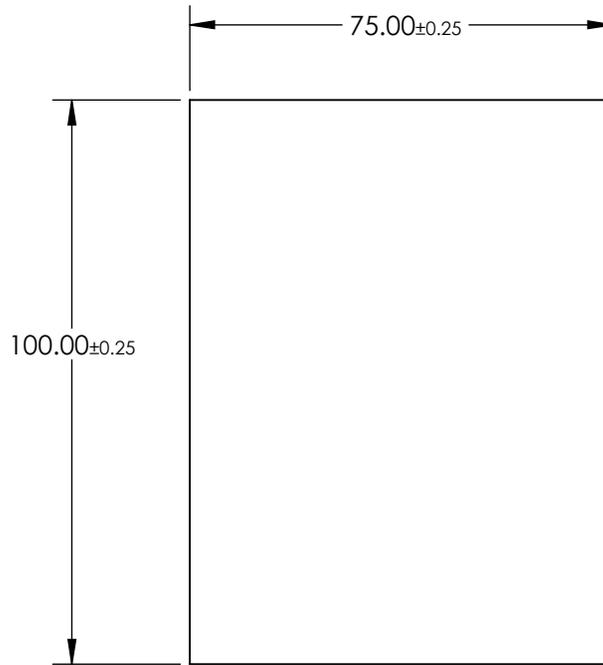

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	N/A
SURFACE FLATNESS	4 - 6λ	N/A
CLEAR APERTURE	71.25 x 95.00	N/A
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION

ALL DIMS IN mm

**Edmund Optics®**

TITLE

75 x 100mm Protected Silver, 4-6λ Mirror

DWG NO

36055

SHEET  
1 OF 1