
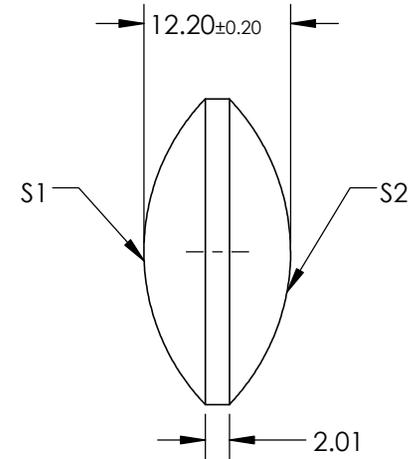


NOTES:


1. SUBSTRATE: CALCIUM FLUORIDE (CaF₂)
2. COATING (APPLY ACROSS CLEAR APERTURE)
S1: NONE
S2: NONE
3. DESIGN WAVELENGTH: 5 μm
4. FOCAL LENGTH TOLERANCE: ±2 @ DWL
5. RoHS: COMPLIANT

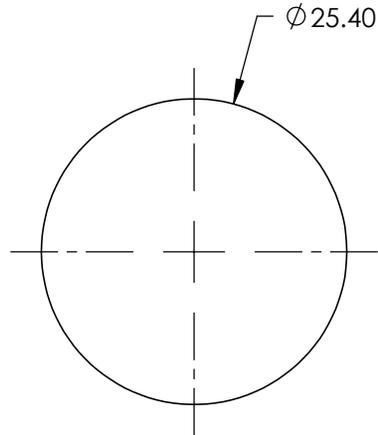

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1 & S2
SHAPE	CONVEX
RADIUS	18.37
SURFACE QUALITY	60-40
CLEAR APERTURE	90%
BEVEL MAX	PROTECTIVE AS NEEDED

EFL @ 5μm	25.4	 Edmund Optics®		
BFL @ 5μm	20.61			
THIRD ANGLE PROJECTION 	TITLE	25.4mm DIAMETER X 25.4mm FL, CaF ₂ DOUBLE-CONVEX LENS		
ALL DIMS IN	mm	DWG NO	47056	SHEET 1 OF 1