

NOTES:




1. SUBSTRATE MATERIAL: Fused Silica
2. SURFACE S2 TO BE PARALLEL WITH S1 TO 30 arcsec
3. COATING (APPLY ACROSS CLEAR APERTURE)

S1: Enhanced Aluminum
R(avg) >95% @ 450 - 650nm

S2: NONE

 FINE GRIND SURFACE


5. RoHS COMPLIANT

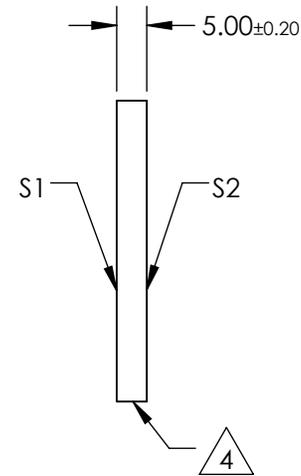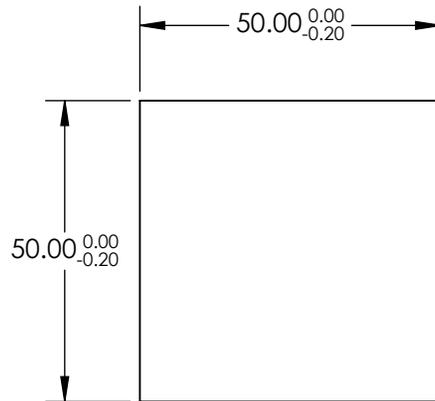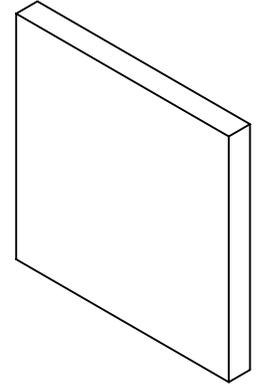

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

 **Edmund Optics®**

| | | | | | | | |
|------------------|----------------------|----------------------|--|----|--------|---|-----------------|
| REV. A | S1 | S2 | THIRD ANGLE PROJECTION  | | TITLE | 50mm Square, Enhanced Aluminum Coated, λ/10 Mirror | |
| SURFACE QUALITY | 20-10 | COMMERCIAL POLISH | ALL DIMS IN | mm | DWG NO | 64020 | SHEET 1 OF 1 |
| SURFACE FLATNESS | λ/10 | NA | | | | | |
| BEVEL | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED | | | | | |