


NOTES:

1. SUBSTRATE: FUSED SILICA
2. COATING (APPLY ACROSS CLEAR APERTURE)
S1: NONE
S2: NONE
3. EDGES: FINE GROUND
4. CENTERING: <3-5 ARCMIN
5. ASPHERE FIGURE ERROR: 0.75µm µm RMS

△ 6. ASPHERIC SURFACE DESCRIBED BY (REF. COEFFICIENT TABLE)


$$Z_{ASPH}(Y) = \frac{(\frac{1}{RADIUS}) * Y^2}{1 + \sqrt{1 - (1+k) * (\frac{1}{RADIUS})^2 * Y^2}} + D * Y^2 + E * Y^4 + F * Y^6 + G * Y^8 + H * Y^{10} + J * Y^{12} + L * Y^{14}$$

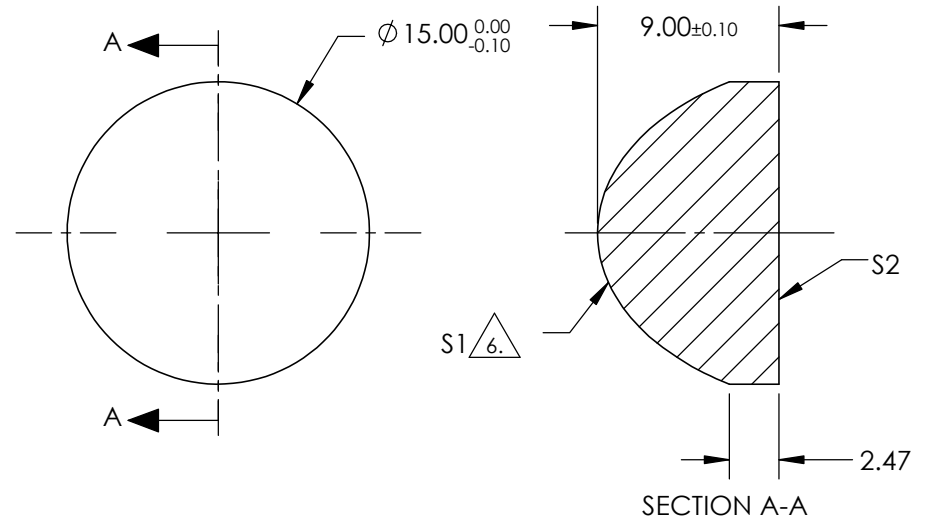

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

COEFFICIENT TABLE △ 7	
COEFFICIENT	S1
k	-1.123452E+00
D	0.000000E+00
E	3.801254E-04
F	2.946223E-06
G	-1.655839E-08
H	5.349691E-10
J	0.000000E+00
L	0.000000E+00

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL @ 587.6nm	12.5	 Edmund Optics®		
SHAPE	CONVEX	PLANO	BFL @ 587.6nm	6.33			
RADIUS	5.731	INFINITY			TITLE	15mm DIA 0.60 NA UNCOATED, UV FUSED SILICA ASPHERIC LENS	
SURFACE QUALITY	60-40	60-40					
CLEAR APERTURE	90%	90%					
BEVEL MAX	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	67264	SHEET 1 OF 1