



NOTES:

1. SUBSTRATE: Float Glass
2. COATING (APPLY ACROSS CLEAR APERTURE)
 - S1: Protected Silver (450-10000nm)
 - R(AVG) >98% @ 450 - 800nm
 - R(AVG) >98.5% @ 2000 - 10,000nm

S2: NONE

3. EDGES SEAMED


4. ROHS COMPLIANT

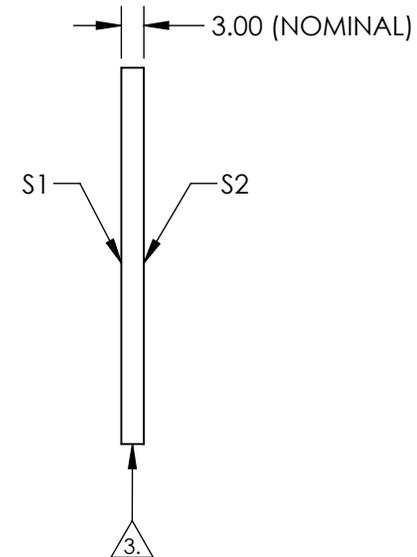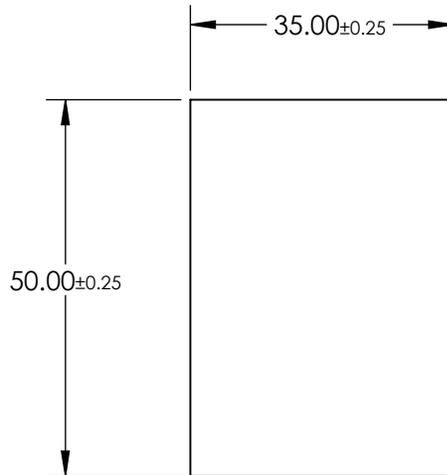

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

| | S1 | S2 |
|------------------|---------------------|---------------------|
| SHAPE | PLANO | PLANO |
| SURFACE QUALITY | 60-40 | N/A |
| SURFACE FLATNESS | 4 - 6λ | N/A |
| CLEAR APERTURE | 33.25 x 47.50 | N/A |
| BEVEL | PROTECTED AS NEEDED | PROTECTED AS NEEDED |

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

 **Edmund Optics®**

TITLE: 35 x 50mm Silver, 4-6λ Mirror

DWG NO: 89490

SHEET 1 OF 1