

NOTES:

1. SUBSTRATE MATERIAL:
N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)


S1 & S2:
LASER V-COAT

R(abs) <0.25% @ 1064nm

3. FINE GROUND SURFACE


4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. RoHS COMPLIANT

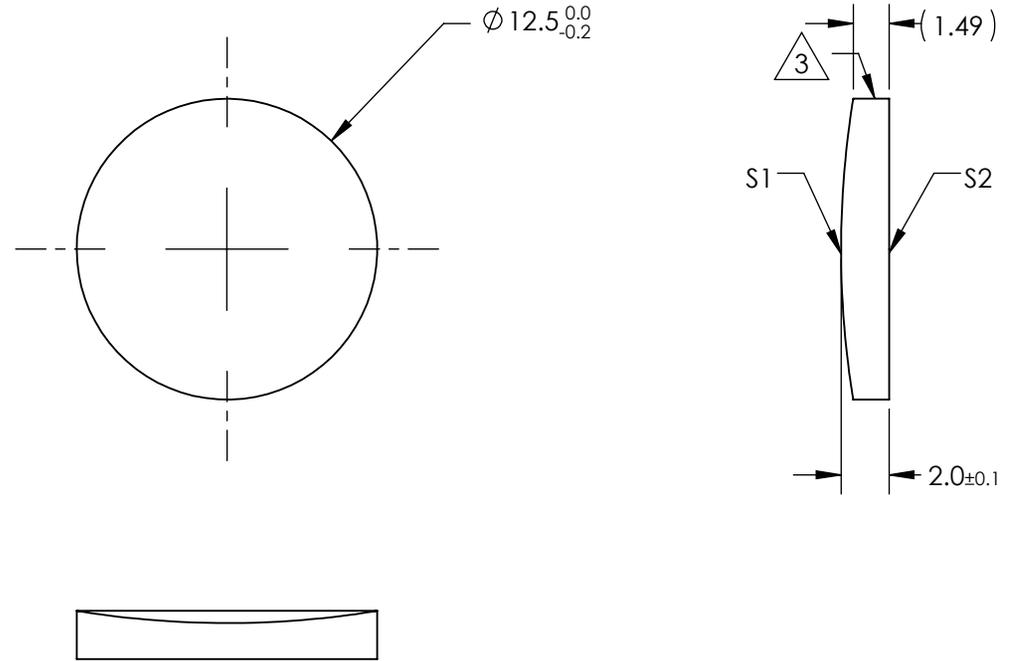

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2					
SHAPE	CONVEX	PLANO	EFL	75±3%	 Edmund Optics®		
RADIUS	38.76	∞	BFL	(73.68)			
SURFACE QUALITY	60-40	60-40	THIRD ANGLE PROJECTION 		TITLE	12.5mm DIA X 75.0mm FL 1064nm V-COAT, CYLINDER LENS	
CLEAR APERTURE	$\phi 11.50$	$\phi 11.50$			ALL DIMS IN	mm	DWG NO
COATING APERTURE	$\phi 11.50$	$\phi 11.50$					SHEET 1 OF 1
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					