


- 1. SUBSTRATE MATERIAL: N-BK7
- 2. COATING (APPLY ACROSS CLEAR APERTURE)

\$1 & \$2: NIR I (600-1050nm) R(AVG) ≤0.5% @ 600 - 1050nm

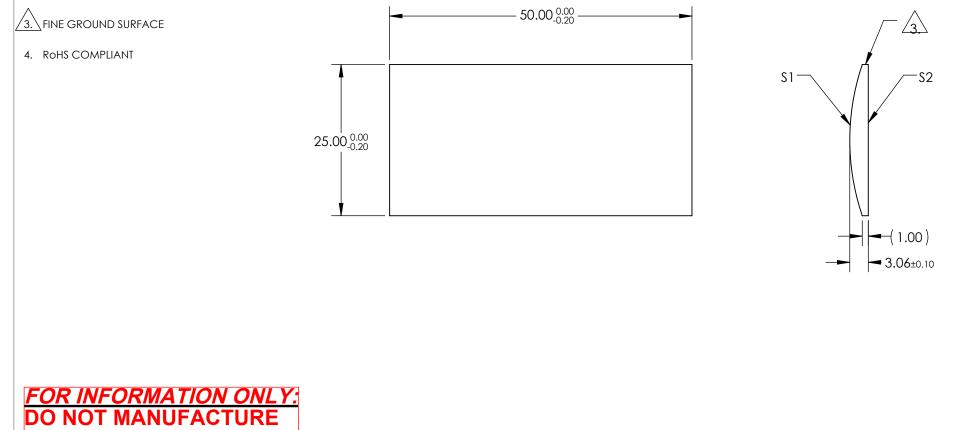

## PARTS TO THIS DRAWING

## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	S1	\$2	EFL	75.00		Edmund Optic	<b>N</b> R
SHAPE	CONVEX	PLANO	BFL	72.89		Edmund Optic	<i>ເ</i> ວັ
RADIUS	38.89	INFINITY			TITLE	25mm H X 50mm L X 75mm FL NIR I COATED, CYLINDER LENS	
SURFACE QUALITY	60-40	60-40					
CLEAR APERTURE	24.00 x 49.00	24.00 x 49.00					
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	69759	SHEET 1 OF 1