

NOTES:

1. SUBSTRATE MATERIAL:
N-SF11
2. COATING (APPLY ACROSS CLEAR APERTURE)



S1 & S2: MgF2

R(avg) $\leq 1.75\%$ @ 400 - 700nm



3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

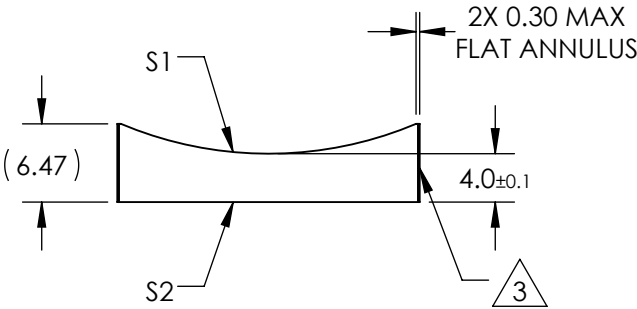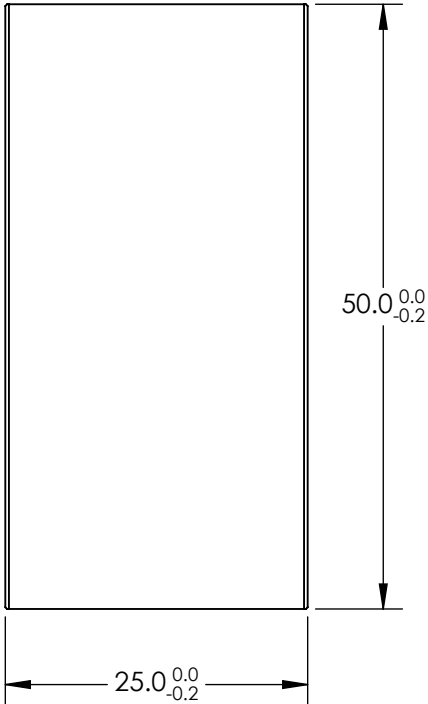

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	<div>EFL-40</div> <div>BFL-42.24</div> <div> Edmund Optics®</div>				
SHAPE	CONVEX	PLANO					
RADIUS	-31.39	∞	<div>THIRD ANGLE PROJECTION</div> <div>TITLE</div> <div>25mm H X 50mm L X -40mm FL MgF2 COATED, CYLINDER LENS</div>				
SURFACE QUALITY	60-40	60-40					
CLEAR APERTURE	24.00 X 49.00	24.00 X 49.00	<div>ALL DIMS IN</div> <div>mm</div> <div>DWG NO</div> <div>68080</div> <div>SHEET 1 OF 1</div>				
COATING APERTURE	24.00 X 49.00	24.00 X 49.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					