
## NOTES:


1. COATING (APPLY ACROSS CLEAR APERTURE)


LASER V-COAT

 $R(ABS) \le 0.25\% @ 355nm$ 


2. RoHS: COMPLIANT



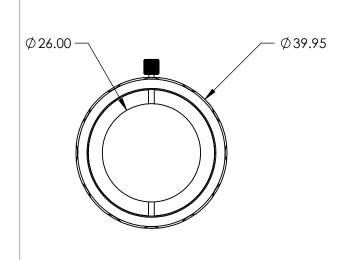

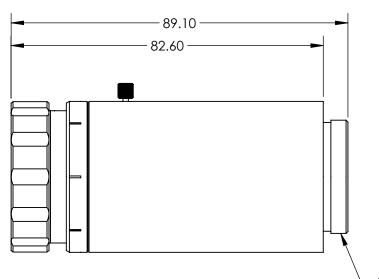

ALL DIMS IN

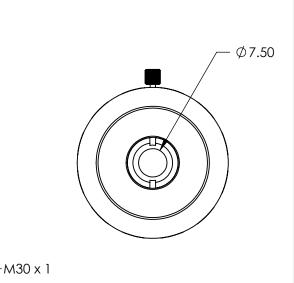

SHEET 1 OF 1

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

DAMAGE THRESHOLD (PULSED)	2.5J/cm² @ 10ns, 20Hz, 355nm
DESIGN WAVELENGTH DWL (nm)	355
expansion power	10X
transmission (%)	> 99 (NOMINAL)
NOMINAL PERFORMANCE	<λ/10 FOR 2.3mm INPUT BEAM (NOMINAL)

		Edmund Optics®
THIRD ANGLE PROJECTION	TITLE	10X, 355nm VEGA™ Nd:YAG LASER LINE BEAM EXPANDER

35115

DWG NO