
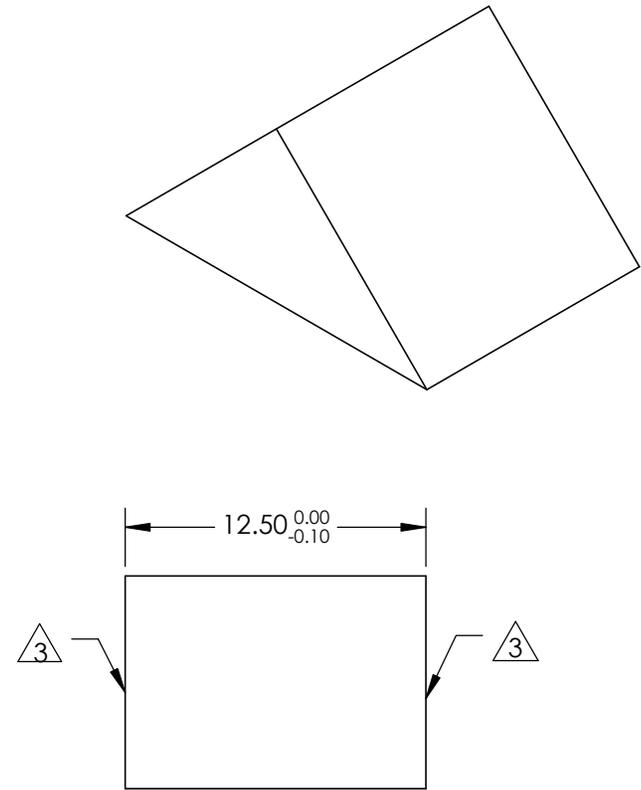


NOTES:

1. SUBSTRATE: FUSED SILICA
2. COATING (APPLY ACROSS COATING APERTURE)
 S1: UNCOATED
 S2: UNCOATED

 FINE GRIND SURFACE


4. ROHS COMPLIANT

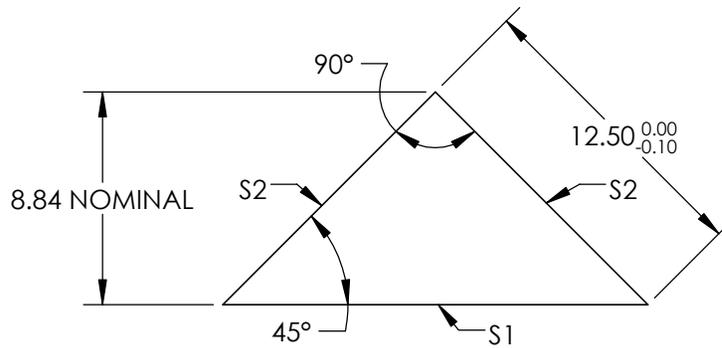

**FOR INFORMATION ONLY:
 DO NOT MANUFACTURE
 PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2
SHAPE	PLANO	PLANO
ANGLE TOL. (arcsec)	15	15
PYRAMID TOLERANCE (arcsec)	60	60
SURFACE QUALITY	20-10	20-10
SURFACE FLATNESS	$\Lambda/20$	$\Lambda/20$
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

 **Edmund Optics®**

TITLE	12.5mm, 1/20 WAVE, HT RA, FS PRISM		
DWG NO	35903	SHEET 1 OF 1	