
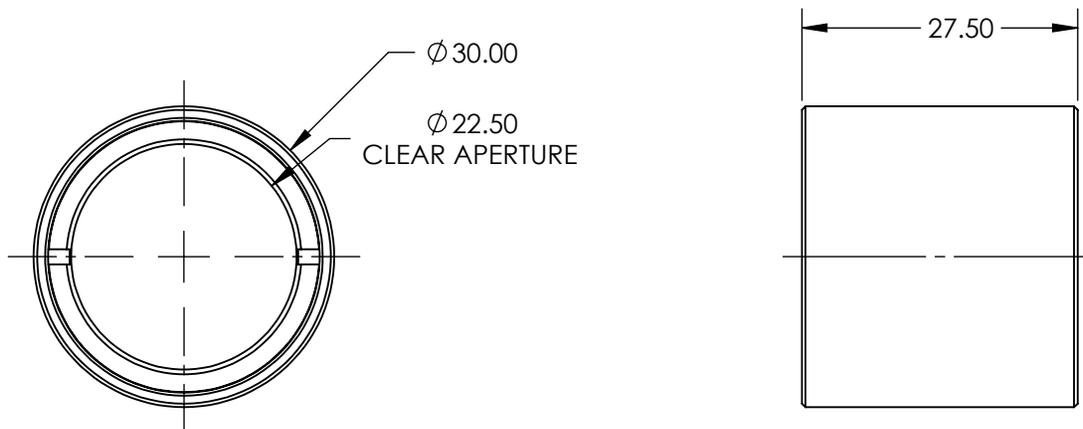



NOTES:

1. SUBSTRATE: CaF2 / FUSED SILICA / CaF2
2. COATING: UNCOATED
3. WAVELENGTH RANGE: 193 - 1000nm



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

EFL @ 248nm	45	 Edmund Optics®	45 mm EFL UNCOATED, UV-TO-NIR CORRECTED TRIPLET	
BFL @ 248nm	34.84			
THIRD ANGLE PROJECTION 	TITLE			
ALL DIMS IN	mm	DWG NO	47613	SHEET 1 OF 1

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY