

NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLOW ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. BLAZE ANGLE: 22° 01' NOMINAL BLAZE WAVELENGTH: 1250nm EFFICIENCY: 60-80% @ BLAZE WAVELENGTH



5. Rohs Compliant

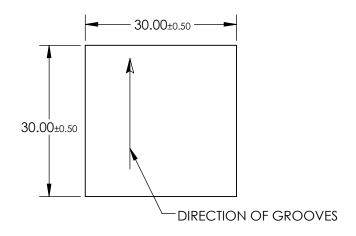





SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

	\$1	\$2			
SHAPE	PLANO	PLANO			
CLEAR APERTURE	27.0 x 27.0	27.0 x 27.0			

	Edmund	Optics®

THIRD ANGLE PROJECTION		TITLE	GRATING DIFF 600GR 1250nm 30 3	
				SHEET
ALL DIMS IN	mm	DWG NO	46076	1 OF 1