
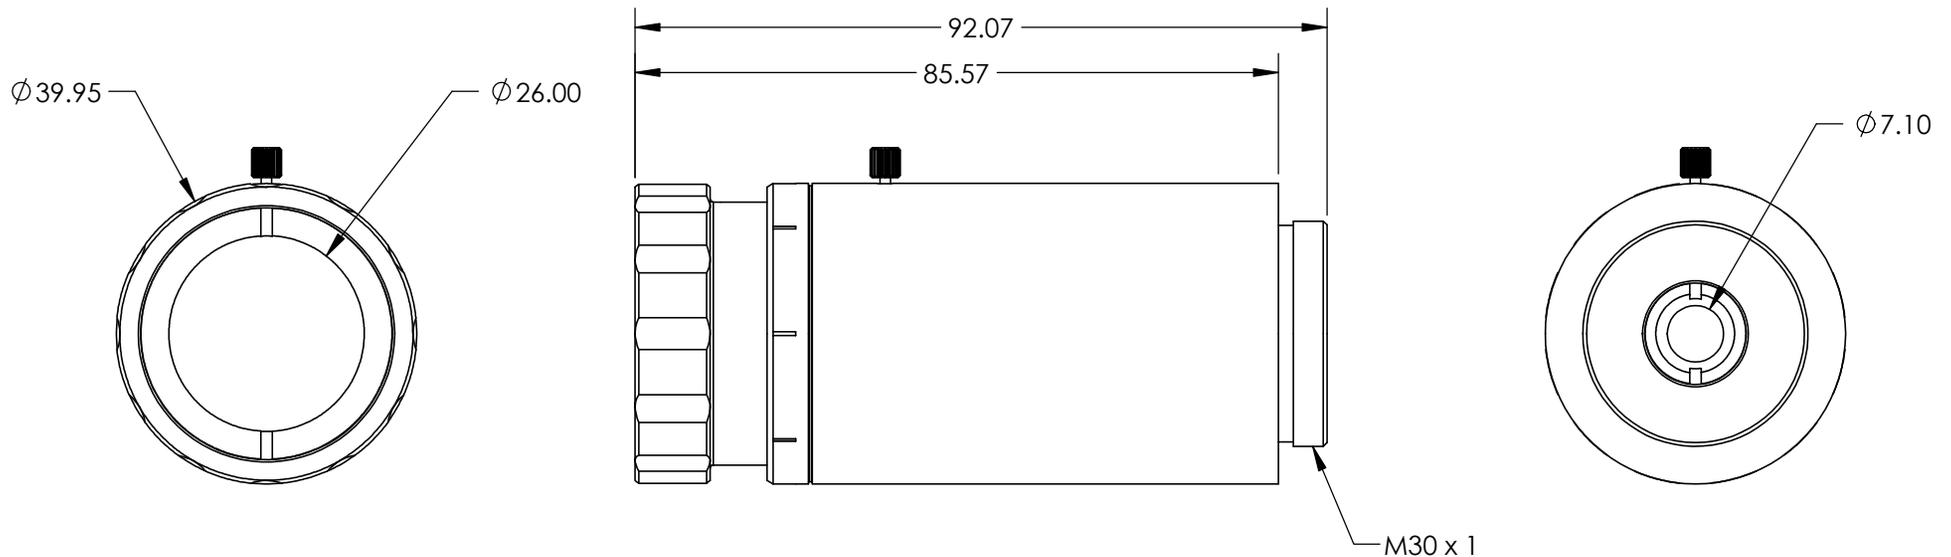


NOTES:

1. COATING (APPLY ACROSS CLEAR APERTURE)  
LASER V-COAT  
R(ABS) ≤ 0.25% @ 1064nm
2. RoHS: COMPLIANT

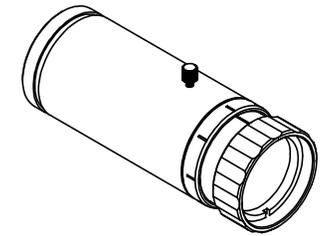

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

DAMAGE THRESHOLD (PULSED)	10J/cm <sup>2</sup> @ 10ns, 20Hz, 1064nm
DESIGN WAVELENGTH DWL (nm)	1064
EXPANSION POWER	7X
TRANSMISSION (%)	> 99 (NOMINAL)
NOMINAL PERFORMANCE	<λ/10 FOR 3.6mm INPUT BEAM (NOMINAL)



ALL DIMS IN mm



TITLE	7X 1064nm VEGA™ Nd:YAG LASER LINE BEAM EXPANDER	
DWG NO	35113	SHEET 1 OF 1