
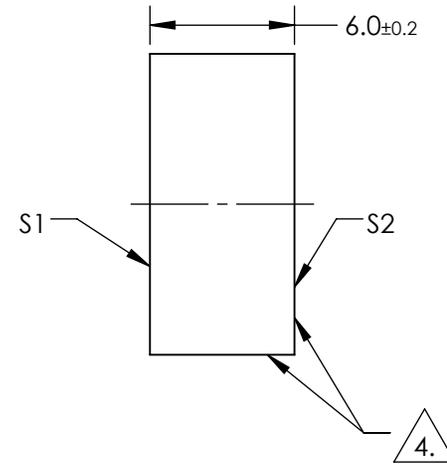
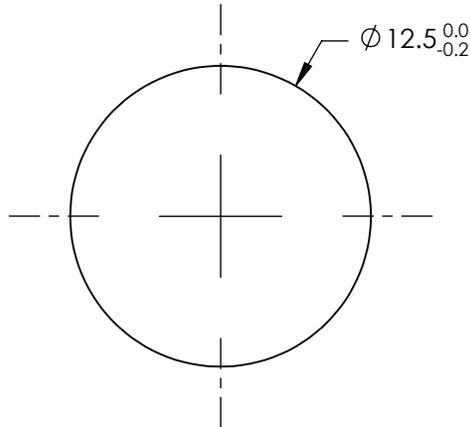


NOTES:

1. SUBSTRATE:  
FUSED SILICA
2. COATING SPECIFICATIONS APPLY ACROSS COATING APERTURE  
S1: ENHANCED ALUMINUM  
R(avg) >88% @ 190 - 195nm  
R(avg) >85% @ 200nm - 600nm  
S2: NONE
3. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN <3 ARCMIN
4. FINE GROUND SURFACE
5. ROHS COMPLIANT

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

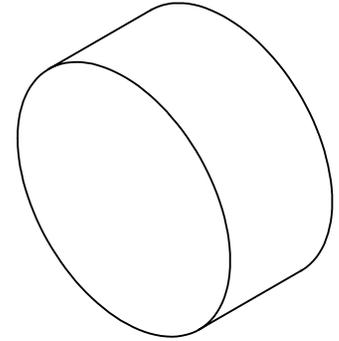

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A.	S1	S2
SHAPE	PLANO	PLANO
CLEAR APERTURE	>90%	N/A
SURFACE QUALITY	10-5	FIND GROUND
SURFACE FLATNESS	1/10 WAVE	N/A
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED



ALL DIMS IN

mm



**Edmund Optics®**

TITLE

12.5mm Dia., Deep UV (DUV) Mirror

DWG NO

48567

SHEET  
1 OF 1