

NOTES:

1. SUBSTRATE MATERIAL:
N-SF11

2. COATING (APPLY ACROSS CLEAR APERTURE)

S1: R(abs) <0.25% @ 405nm
R(avg) <1.5% @ 375 - 435nm

S2: R(abs) <0.25% @ 405nm
R(avg) <1.5% @ 375 - 435nm



S3: NONE

 FINE GRIND SURFACE

4. DESIGN WAVELENGTH (DWL): 405nm

5. SET OF 2 PRISMS

6. RoHS COMPLIANT

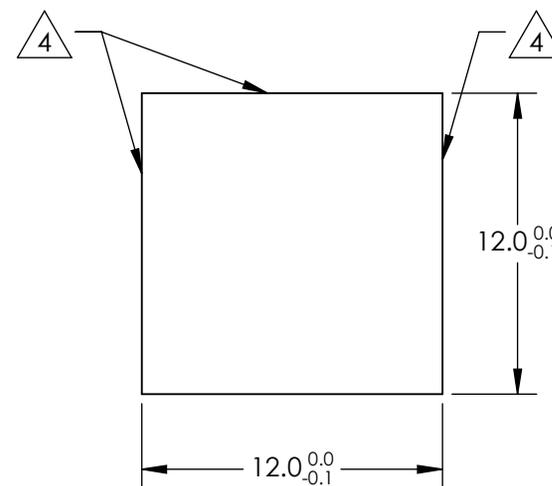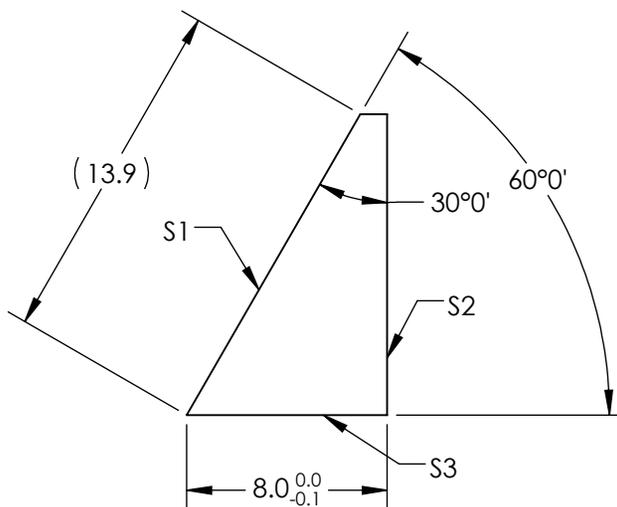


**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	S3
SHAPE	PLANO	PLANO	PLANO
SURFACE FLATNESS	1/10 WAVE	1/10 WAVE	1/10 WAVE
SURFACE QUALITY	20-10	20-10	20-10
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION



ALL DIMS IN

mm

 **Edmund Optics®**

TITLE

405nm LASER LINE COATED, UNMOUNTED
ANAMORPHIC PRISM PAIR

DWG NO

65933

SHEET
1 OF 1