
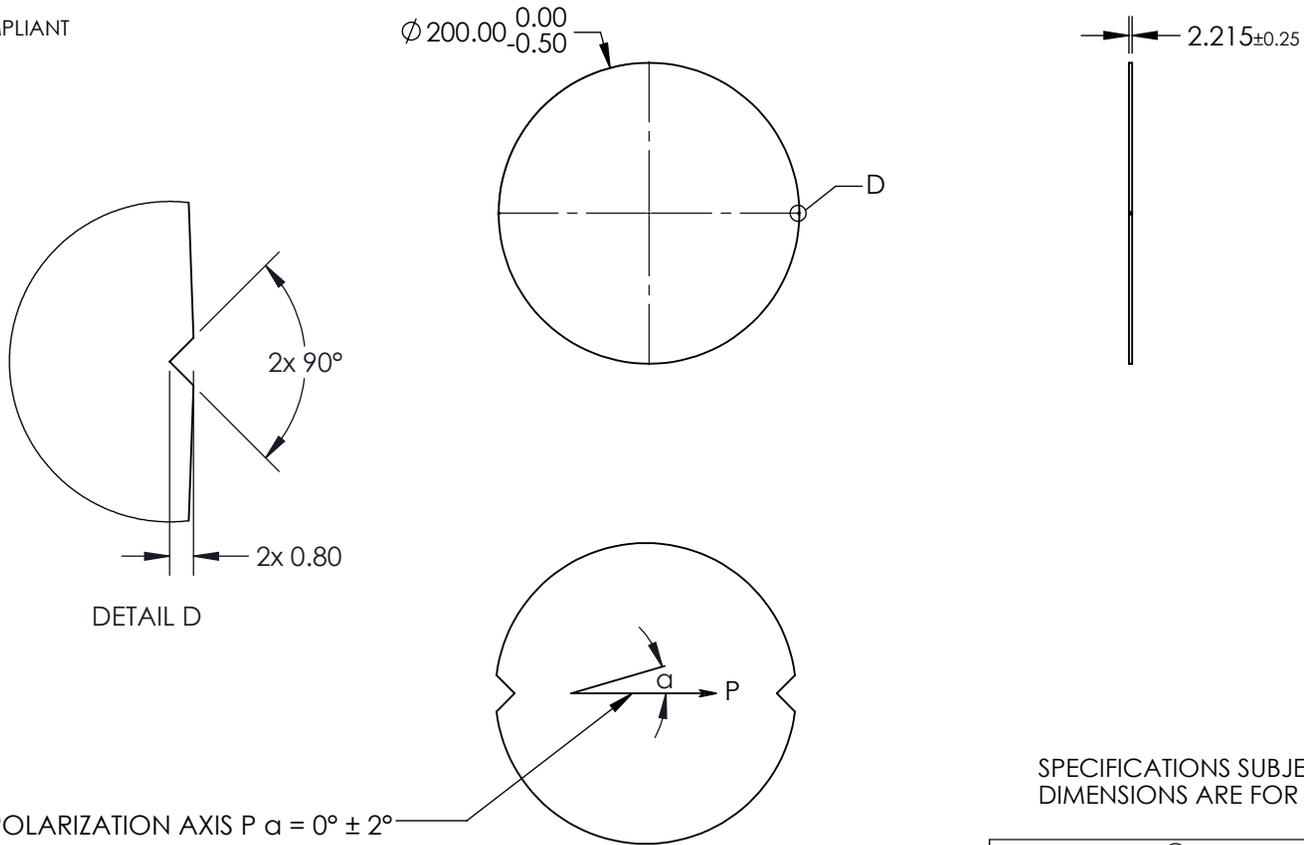


NOTES:

1. SUBSTRATE: PMMA
2. WAVELENGTH RANGE (nm): 400 - 700
3. EXTINCTION RATIO: 9000:1
4. OPERATING TEMPERATURE (°C): -40 to +80
5. TRANSMISSION (%):  
 Single: 42  
 Parallel: 36  
 Crossed: < 0.004
6. RoHS: COMPLIANT

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® Edmund Optics®

THE POLARIZERS CONSISTS OF A POLYMER POLARIZATION  
FILM LAMINATED ONTO PMMA.

|                        |    |        |   |                 |
|------------------------|----|--------|---|-----------------|
| THIRD ANGLE PROJECTION |    | TITLE  | 200mm Diameter Linear Plastic Polarizer,<br>Unmounted |                 |
| ALL DIMS IN            | mm | DWG NO | 86204   | SHEET<br>1 OF 1 |