

NOTES:



- 1. SUBSTRATE:  
ZERODUR
- 2. S2 TO BE PARALLEL TO S1 TO WITHIN <30 ARCSEC
- 3. COATING (APPLY ACROSS COATING APERTURE)  
S1: ENHANCED ALUMINUM  
R(AVG) > 95% FROM 450-650nm @ 0° AOI  
  
S2: NONE

4. FINE GROUND SURFACE

- 5. CLEAR APERTURE AND COATING APERTURE ARE CENTERED ON SURFACE
- 6. SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

7. ARROW ON EDGE POINTS TOWARDS 1/10TH WAVE SURFACE S1

- 8. ROHS: COMPLIANT

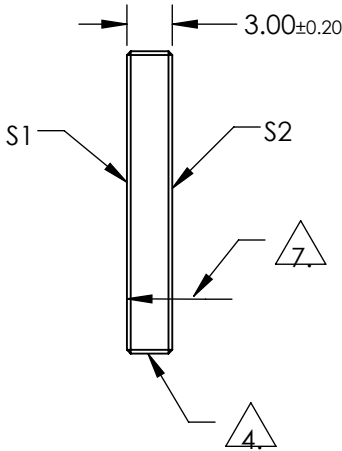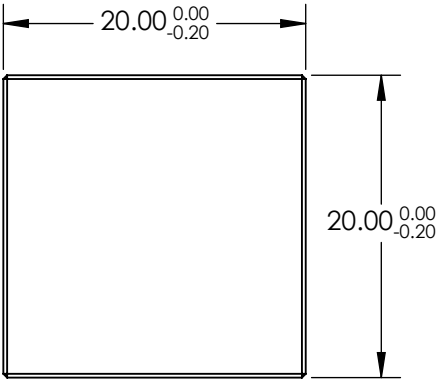

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2				
SHAPE	PLANO	PLANO	<div><div>THIRD ANGLE PROJECTION</div><div></div><div>TITLE</div><div>MIRROR 1/10 WV ZDUR EN AI 20 SQ</div></div>			
SURFACE QUALITY	20-10	COMMERCIAL POLISH				
SURFACE FLATNESS	0.10 WAVE	N/A				
CLEAR APERTURE	18.00 x 18.00	N/A				
COATING APERTURE	19.20 x 19.20	N/A				
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	39851
					SHEET 1 OF 1	

Edmund Optics®