NOTES:


1. SUBSTRATE: FLOAT GLASS


2. COATING (APPLY ACROSS CLEAR APERTURE)

\$1 & \$2: BBAR (425-700nm) Ra(AVG)≤0.5% @ 425 - 700nm

3. FINE GRIND SURFACE

4. ROHS COMPLIANT

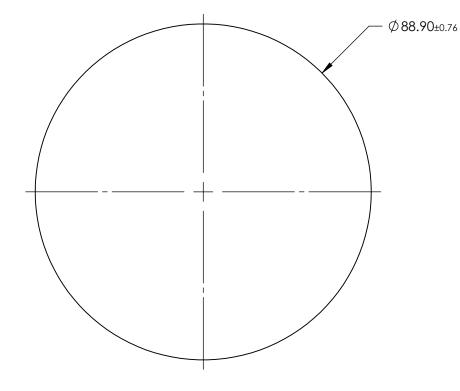

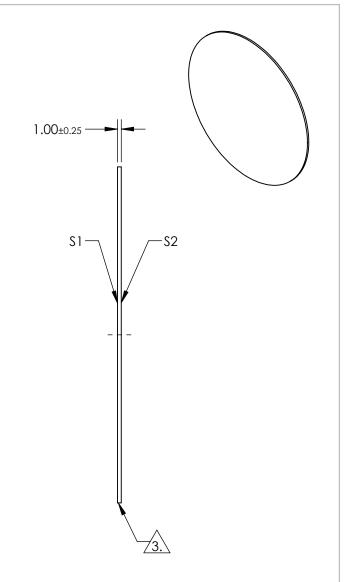

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2			
SHAPE	PLANO	PLANO			
SURFACE QUALITY	80-50	80-50			
CLEAR APERTURE	Ø80.01	Ø80.01			
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED			

		Edmund Optics®		
THIRD ANGLE PROJECTION	ϕ	TITLE	88.9mm Dia. x 1mm High Efficiency Wi	ndow
ALL DIMS IN	mm	DWG NO	39282	SHEET 1 OF 1