NOTES:

- 1. SUBSTRATE: FUSED SILICA
- 2. COATING:

S1: R(ABS) >99.80% @ 355nm @ 0-45° AOI DAMAGE THRESHOLD, PULSED: 5 J/cm² @ 355nm, 20ns, 20Hz DAMAGE THRESHOLD, CW: 1MW/cm² @ 355nm

Ø 50.80^{0.00}_{-0.20}


S2: NONE

- 3. FINE GRIND SURFACE
- 4. RoHS: COMPLIANT



- 10.00±0.20

/3.

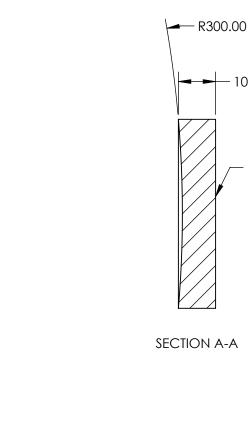

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2	EFL: 150mm		Edmund Optics [®]
SHAPE	CONCAVE	PLANO	BFL: N/A		
SURFACE QUALITY	20-10	FINE GRIND		TITLE	50.8mm Dia. x 150mm EFL, 355nm 0-45°, Concave Laser Line Mirror
SURFACE FLATNESS	3λ/20	N/A			
CLEAR APERTURE	Ø45.72	N/A			
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN mm	DWG NO	11334 SHEET 1 OF 1

Α

A