

NOTES:


1. SUBSTRATE:
S-LAH64
2. CENTERING TOLERANCE (AT 587.6nm):
BEAM DEVIATION (HALF ANGLE): <3 ARCMIN
3. COATING (APPLY ACROSS COATING APERTURE)
S1: NONE
S2: NONE

4. EDGES: FINE GROUND

5. ASPHERIC SURFACE DESCRIBED BY (REF. COEFFICIENT TABLE):

$$Z_{ASPH}(Y) = \frac{(\frac{1}{RADIUS}) * Y^2}{1 + \sqrt{1 - (1+k) * (\frac{1}{RADIUS})^2 * Y^2}} + D * Y^2 + E * Y^4 + F * Y^6 + G * Y^8 + H * Y^{10} + J * Y^{12} + L * Y^{14}$$

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

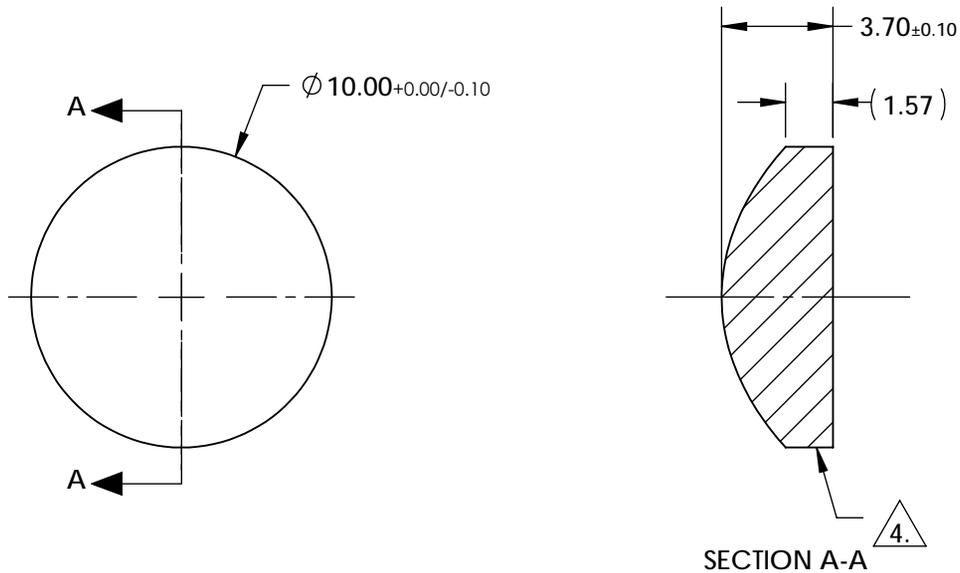

COEFFICIENT TABLE 5.	
COEFFICIENT	S1
SEMI-DIAMETER	5.000000E+00
(1/RADIUS)	1.609011E-01
k	-9.930000E-01
D	0.000000E+00
E	1.932900E-04
F	-1.552500E-07
G	-1.140000E-08
H	-1.022900E-10
J	1.394500E-12
L	0.000000E+00

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2				
SHAPE	CONVEX	PLANO	BFL @ 780nm:			
RADIUS	6.215	INFINITY	THIRD ANGLE PROJECTION			
SURFACE QUALITY	40-20	40-20	TITLE	10mm Dia., 0.63 Numerical Aperture Uncoated, NIR Aspheric Lens		
CLEAR APERTURE	90 %	90 %	DWG NO	13496		SHEET 1 OF 1
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm		

Edmund Optics®