

NOTES:

1. SUBSTRATE: FLOAT GLASS
2. ROHS: COMPLIANT
3. COATING (APPLY ACROSS CLEAR APERTURE):

S1:



ABRASION: SEVERE, PER MIL-C-675C Paragraph 3.8.4.1

ADHESION: MIL-PRF-13830B, App B PARA. 4.4.6

R(AVG) >70% @ 400 - 700nm

R(AVG) >90% @ 2000 - 10000nm

S2: NONE

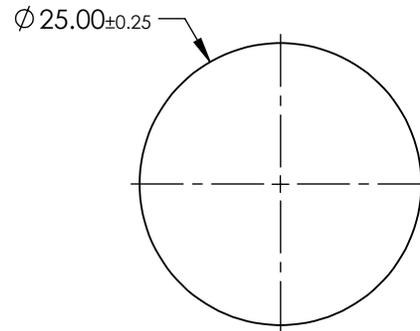

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	80 - 50	COMMERCIAL POLISH
CLEAR APERTURE	$\text{Ø}22.50$	N/A
SURFACE FLATNESS	$4 - 6\lambda$	N/A
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED



ALL DIMS IN mm

EO® **Edmund Optics**®

TITLE

MIRROR 4-6 WAVE RH 25mm DIA

DWG NO

15489

SHEET
1 OF 1