NOTES:

1. SUBSTRATE: N-SF5

2. COATING (APPLY ACROSS CLEAR APERTURE)

   S1: NONE
   S2: NONE

3. EDGES: FINE GROUND

4. CENTERING: <3 ARCMIN

5. ASPHERE FIGURE ERROR: 0.25µm RMS

6. ASPHERIC SURFACE DESCRIBED BY (REF. COEFFICIENT TABLE)

$$Z_{ASPH}(Y) = \frac{(1/RADIUS) * Y^2}{1+\sqrt{1-(1+k)*(1/RADIUS)^2 * Y^2}} + D*Y^2 + E*Y^4 + F*Y^6 + G*Y^8 + H*Y^{10} + J*Y^{12} + L*Y^{14}$$

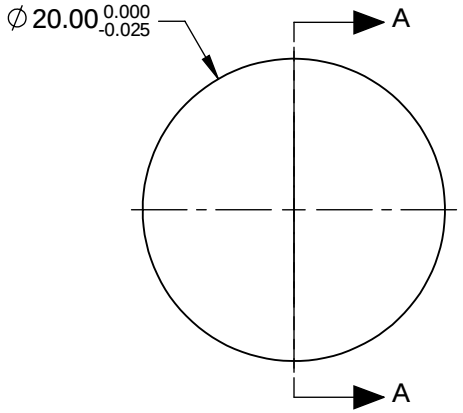

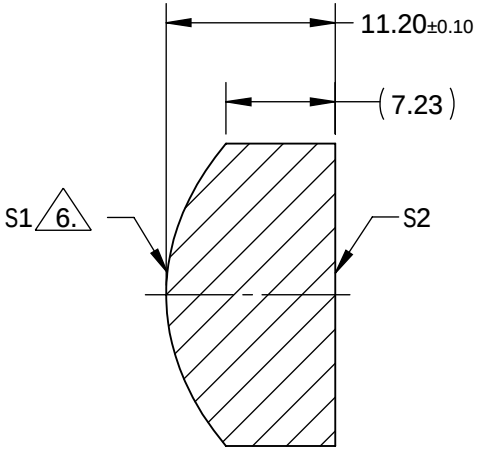

SECTION A-A

COEFFIECIENT TABLE 6.	
COEFFIECIENT	**S1**
SEMI-DIAMETER	1.000000E+01
(1/RADIUS)	7.432181E-02
k	-9.143177E-01
D	0.000000E+00
E	1.841702E-05
F	2.043851E-08
G	-8.357415E-11
H	2.016516E-13
J	0.000000E+00
L	0.000000E+00

FOR INFORMATION ONLY:
DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	CONVEX	PLANO
RADIUS	13.455	INFINITY
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	Ø18.00	Ø18.00
BEVEL MAX	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

EFL @ 587.6nm	20.00
BFL @ 587.6nm	13.31
THIRD ANGLE PROJECTION	
ALL DIMS IN	mm

Edmund Optics®

TITLE	20mm DIA., 0.50 NUMERICAL APERTURE, UNCOATED, PRECISION ASPHERIC LENS		
DWG NO	37425	SHEET	1 OF 1