NOTES:

1. SUBSTRATE: N-SF5

2. COATING (APPLY ACROSS CLEAR APERTURE)

   S1: NONE
   S2: NONE

3. EDGES: FINE GROUND

4. CENTERING: <3 ARCMIN

5. ASPHERE FIGURE ERROR: 0.25µm RMS

6. ASPHERIC SURFACE DESCRIBED BY (REF. COEFFICIENT TABLE)

$$Z_{ASPH}(Y) = \frac{(1/RADIUS) * Y^2}{1+\sqrt{1-(1+k)*(1/RADIUS)^2 * Y^2}} + D*Y^2 + E*Y^4 + F*Y^6 + G*Y^8 + H*Y^{10} + J*Y^{12} + L*Y^{14}$$

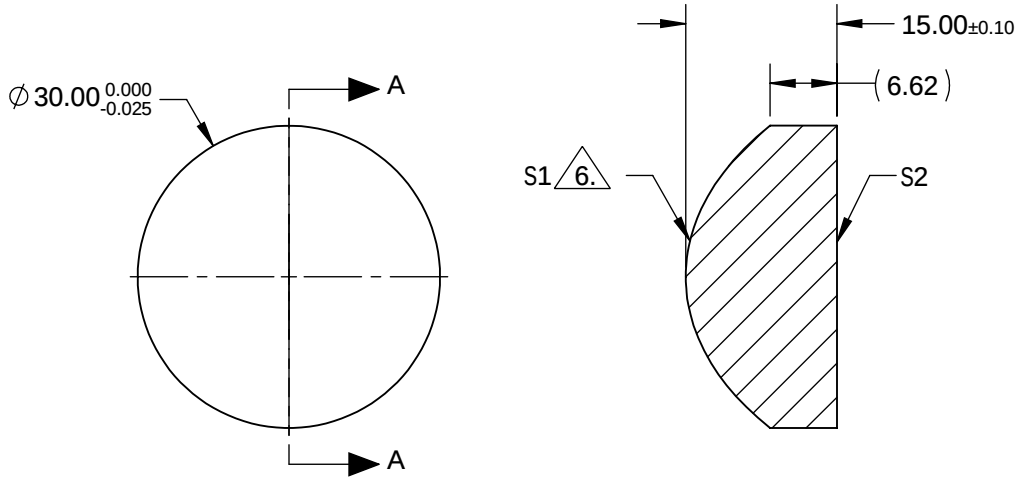

SECTION A-A

COEFFIECIENT TABLE 6.	
COEFFIECIENT	**S1**
SEMI-DIAMETER	1.500000E+01
(1/RADIUS)	6.606765E-02
k	-1.081599E+00
D	0.000000E+00
E	1.9847737E-05
F	8.487952E-09
G	6.836397E-12
H	-5.198550E-14
J	0.000000E+00
L	0.000000E+00

FOR INFORMATION ONLY:
DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	CONVEX	PLANO
RADIUS	15.136	INFINITY
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	Ø27.00	Ø27.00
BEVEL MAX	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

EFL @ 587.6nm	22.50
BFL @ 587.6nm	13.53

THIRD ANGLE PROJECTION

ALL DIMS IN mm

Edmund Optics®

TITLE: 30mm DIA., 0.66 NUMERICAL APERTURE, UNCOATED, PRECISION ASPHERIC LENS

DWG NO: 37433

SHEET 1 OF 1