



NOTES:

1. SUBSTRATE:  
Fused Silica
2. COATING (APPLY ACROSS COATING APERTURE):  
S1 & S2: R(ABS)  $\leq 0.25\%$  @ 880nm  
R(AVG)  $\leq 1.25\%$  @ 400 - 870nm  
R(AVG)  $\leq 1.25\%$  @ 890 - 1000nm
3. EFFECTIVE FOCAL LENGTH: 5.1mm
4. DIVERGENCE ANGLE:  $\pm 1.6^\circ$
5. WAVELENGTH RANGE (nm): 400 - 1000
6. ROHS: COMPLIANT

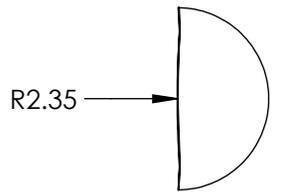

DETAIL A

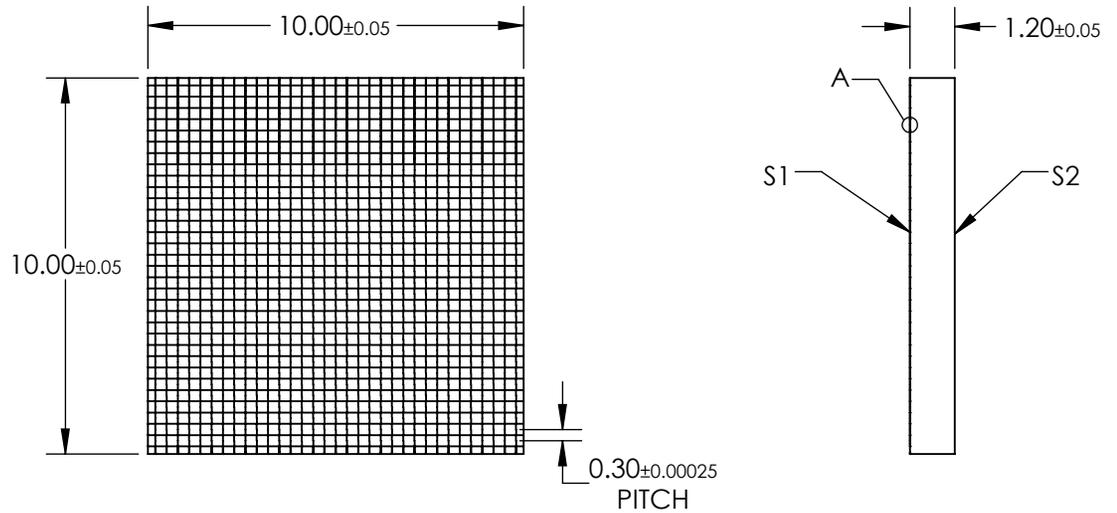

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® Edmund Optics®

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

THIRD ANGLE PROJECTION		TITLE	Microlens Array 10 x 10mm, 300µm Pitch, 1.6° Divergence, VIS-NIR Coated	
ALL DIMS IN	mm	DWG NO	15810	SHEET 1 OF 1