

NOTES:

- SUBSTRATE:
LIBA 2000+
- CENTERING TOLERANCE (AT 587.6nm): BEAM DEVIATION (HALF ANGLE): <25 ARCMIN
- COATING (APPLY ACROSS COATING APERTURE)
S1: R(AVG) ≤ 0.5% FROM 600-1050nm @ 0° AOI
S2: R(AVG) ≤ 0.5% FROM 600-1050nm @ 0° AOI

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**


4. EDGE: AS MOLDED

5. ASPHERIC SURFACE DESCRIBED BY THE FOLLOWING EQUATION AND COEFFICIENTS SHOWN IN TABLE BELOW

$$Z(Y) = \frac{\left(\frac{1}{\text{RADIUS}}\right) * Y^2}{1 + \sqrt{1 - (1+k) * \left(\frac{1}{\text{RADIUS}}\right)^2 * Y^2}} + D * Y^2 + E * Y^4 + F * Y^6 + G * Y^8 + H * Y^{10} + J * Y^{12} + L * Y^{14} + M * Y^{16}$$

6. RoHS: COMPLIANT

COEFFICIENT TABLE 5.	
	S1
Semi-diameter	7.5
Coefficient (1/RADIUS)	1.598177E-01
k	-9.570846E-01
D	0.000000E+00
E	2.301806E-04
F	1.107939E-06
G	1.228793E-08
H	8.094662E-12
J	0.000000E+00
L	0.000000E+00
M	0.000000E+00

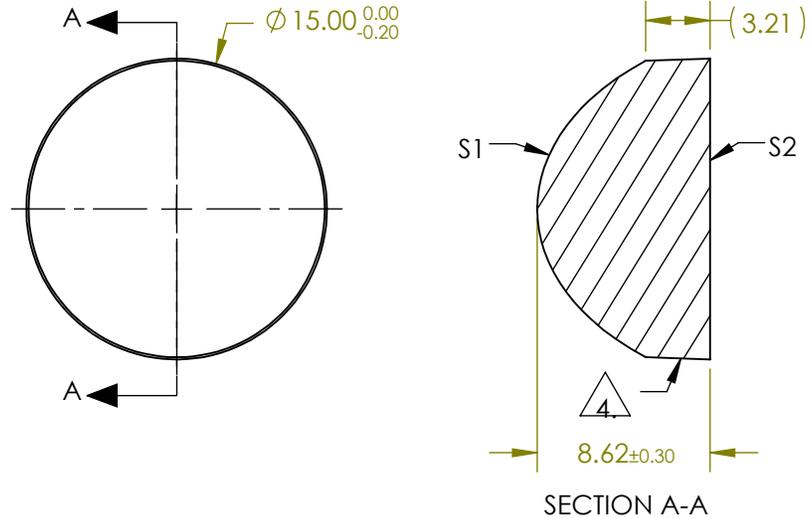

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	EFL: 12.00	Edmund Optics®	
SHAPE	CONVEX	PLANO	BFL: 6.33	TITLE: LENS CONDENSER 15mm X 12mm NIR I TS	
RADIUS	6.257	∞			
SURFACE QUALITY	As Molded	As Molded	THIRD ANGLE PROJECTION	DWG NO: 15730	
CLEAR APERTURE	Ø13.28	Ø13.28			
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN mm	SHEET 1 OF 1	