## NOTES:

1. SUBSTRATE MATERIAL: N-BK7

## 2. ROHS COMPLIANT


## 3. COATING (APPLY ACROSS CLEAR APERTURE)


S1: R(AVG) > 98% @ 340 - 488nm @ 0°, ALL POLARIZATIONS R(AVG) > 98% @ 320 - 450nm @ 45°, ALL POLARIZATIONS R(AVG) > 99% @ 320 - 450nm @ 45°, S-POLARIZATION

S2: NONE

4.

FINE GRIND SURFACE

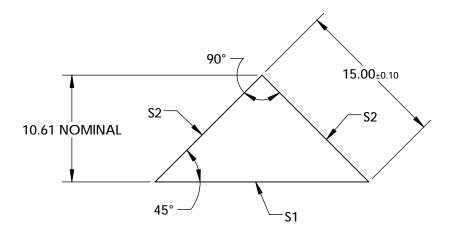

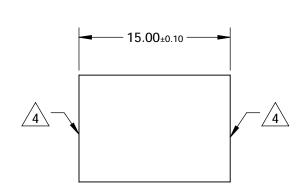

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	<b>S1</b>	S2	
SHAPE	PLANO	PLANO	
ANGLE TOL. (arcmin)	±2	±2	
SURFACE QUALITY	40-20	40-20	
SURFACE FLATNESS	λ/8	λ/8	
CLEAR APERTURE	90%	90%	
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	

		<b>Edmund Optics</b> ®			
THIRD ANGLE PROJECTION		TITLE	15.0mm 320 - 450nm COATED, N-BK7 RIGHT ANGLE MIRROR		
ALL DIMS IN	mm	DWG NO	15596	SHEET 1 OF 1	