

NOTES:

1. SUBSTRATE:





2. SURFACE S2 TO BE PARALLEL TO S1 WITHIN <1 ARCMIN

3. COATING (APPLY ACROSS CLEAR APERTURE)

S1&S2: UNCOATED

4. FINE GRIND SURFACE

5. ROHS COMPLIANT

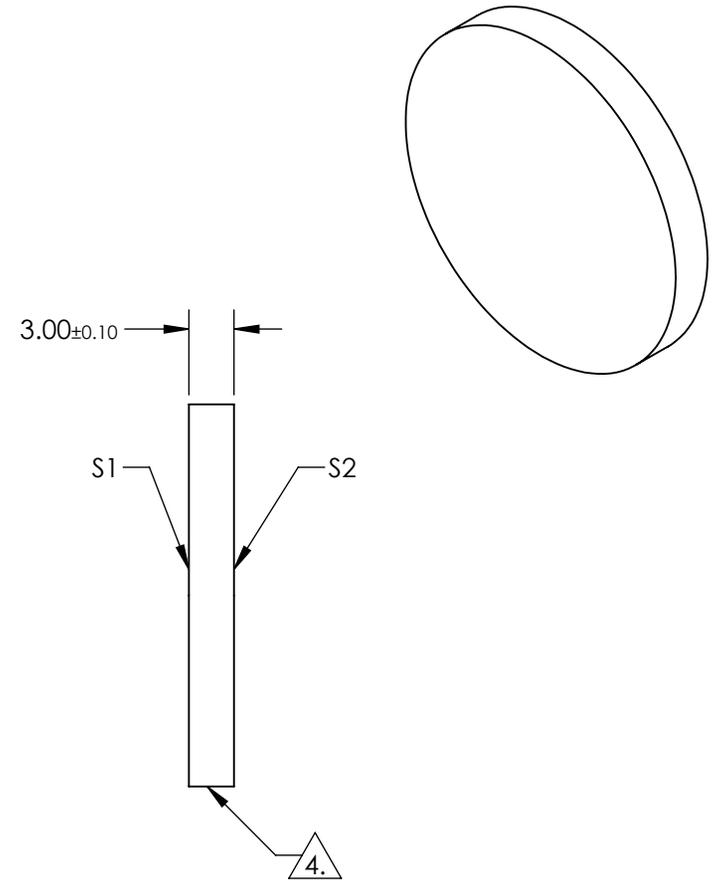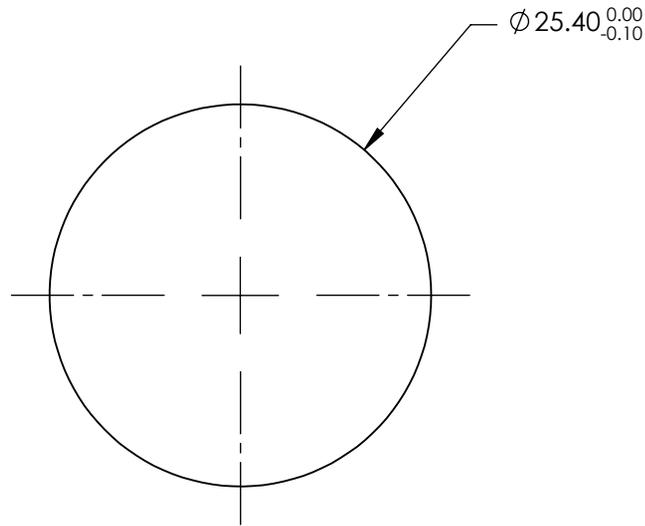

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	40-20	40-20
SURFACE FLATNESS	$\lambda/2$	$\lambda/2$
CLEAR APERTURE (mm)	22.86	22.86
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION

ALL DIMS IN mm

**EO**® Edmund Optics®

TITLE

25.4mm Dia., 3mm Thick, Uncoated,  
Magnesium Fluoride Window

DWG NO

17282

SHEET  
1 OF 1