
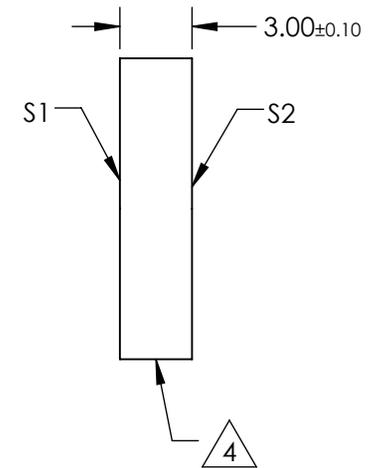
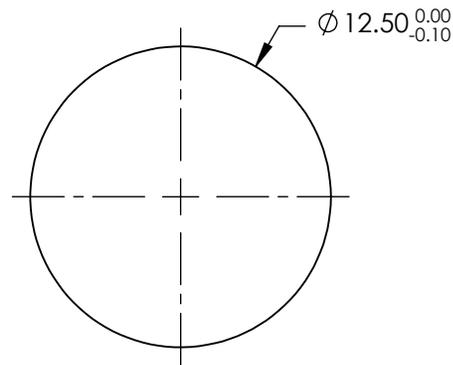


NOTES:


1. SUBSTRATE:
FUSED SILICA (CORNING 7980)
2. S2 TO BE PARALLEL WITH S1 TO WITHIN <1' ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: R(AVG) ≤0.4% @ 425 - 675nm
4. FINE GRIND SURFACE
5. ROHS COMPLIANT

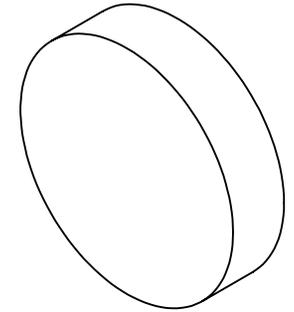

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

| | S1 | S2 |
|---------------------|----------------------|----------------------|
| SHAPE | PLANO | PLANO |
| SURFACE QUALITY | 40-20 | 40-20 |
| CLEAR APERTURE (mm) | Ø11.25 | Ø11.25 |
| BEVEL | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED |



EO® Edmund Optics®

| | | |
|--------|--|--------------|
| TITLE | 12.5mm Dia., 3mm Thick, VIS 0° Coated, λ/4 Fused Silica Window | |
| DWG NO | 18324 | SHEET 1 OF 1 |