
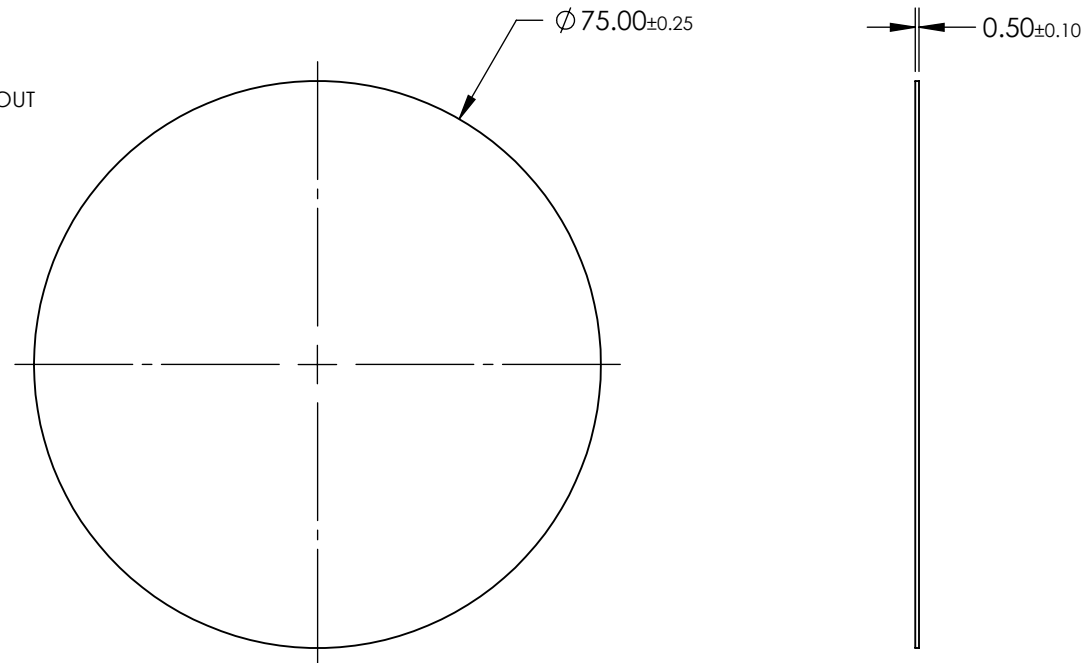


NOTES:


1. SUBSTRATE:  
Polymer Film on TAC
2. COATING  
UNCOATED, PROTECTIVE FILM ON BOTH SIDES
3. POLARIZATION (%):  
99.83 @ 400 - 760nm  
99.63 @ 761 - 2200nm
4. TRANSMISSION (%):  
SINGLE:  
29 @ 400 - 760nm  
39 @ 761 - 2200nm  
  
CROSSED:  
0.02 @ 400 - 760nm  
0.11 @ 761 - 2200nm
5. EXTINCTION RATIO: 400:1 (Average @ 800 - 2200nm)
6. WAVELENGTH RANGE: 400 - 2200 nm
7. POLARIZATION AXIS IS MARKED BY 0.5mm RADIUS CUTOUT
8. ROHS COMPLIANT



**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO  
CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR  
REFERENCE ONLY

**EO<sup>®</sup> Edmund Optics<sup>®</sup>**

THIRD ANGLE PROJECTION 	TITLE		75mm DIA. NIR LINEAR POLARIZING FILM	
	ALL DIMS IN	mm	DWG NO	18944
				SHEET 1 OF 1