NOTES:


- SUBSTRATE: Float Glass
- COATING (APPLY ACROSS CLEAR APERTURE)
 \$1: Enhanced Aluminum (450-650nm)
 R(AVG) ≥95% @ 450 650nm @ 45°

S2: NONE


3.

EDGES GROUND

Rohs Compliant

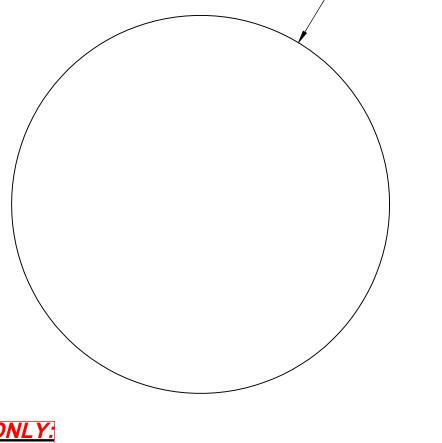

 \emptyset 200.00 $^{0.00}_{-0.25}$

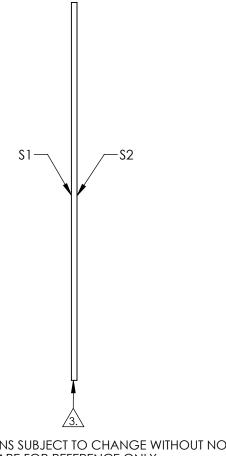

- 3.00 (NOMINAL)

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2]		PI	Edmund Optic	C ®
SHAPE	PLANO	PLANO					
SURFACE QUALITY	60-40	N/A		1		200mm Dia., Enhanced Aluminum, 4-6λ	Mirror
SURFACE FLATNESS	4 - 6λ	N/A	THIRD ANGLE _ PROJECTION	$\bigoplus \bigoplus$	TITLE	20011111 Dia., Efficience / Northinorff, 4 0/	(/ / ()
CLEAR APERTURE	Ø 180.00	N/A		1			0.1557
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	19351	SHEET 1 OF 1