
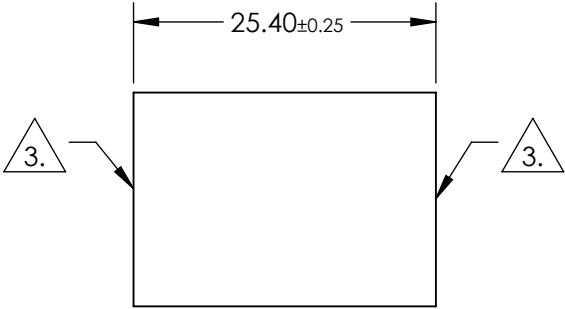
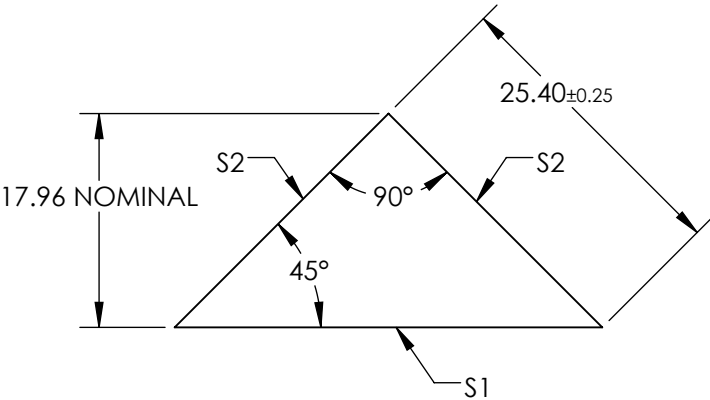


NOTES:

- 1. SUBSTRATE : Calcium Fluoride (CaF2)
- 2. COATING (APPLY ACROSS CLEAR APERTURE)  
S1: Uncoated  
S2: Uncoated

3. FINE GRIND SURFACE

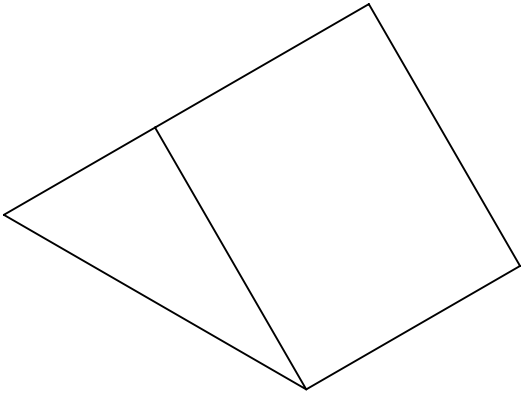

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
CLEAR APERTURE	85%	85%
ANGLE TOL. (arcmin)	±10	±10
SURFACE QUALITY	40-20	40-20
SURFACE FLATNESS	2λ	2λ
WAVELENGTH RANGE (nm)	200 - 7000	200 - 7000
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION

Edmund Optics®

TITLE

Calcium Fluoride, 25.4mm, Uncoated, IR Right Angle Prism

DWG NO

19707

SHEET

1 OF 1