

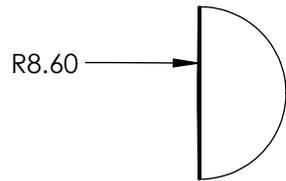


NOTES:

1. SUBSTRATE: FUSED SILICA
2. COATING (APPLY ACROSS COATING APERTURE):
 S1 & S2: R(ABS) $\leq 1.0\%$ @ 350 - 450nm
 R(AVG) $\leq 1.5\%$ @ 250 - 700nm
3. EFFECTIVE FOCAL LENGTH: 18.80mm
4. DIVERGENCE ANGLE: $\pm 0.5^\circ$
5. WAVELENGTH RANGE (nm): 250 - 700
6. ROHS: COMPLIANT

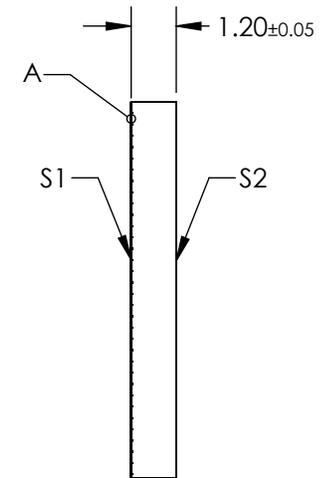

DETAIL A

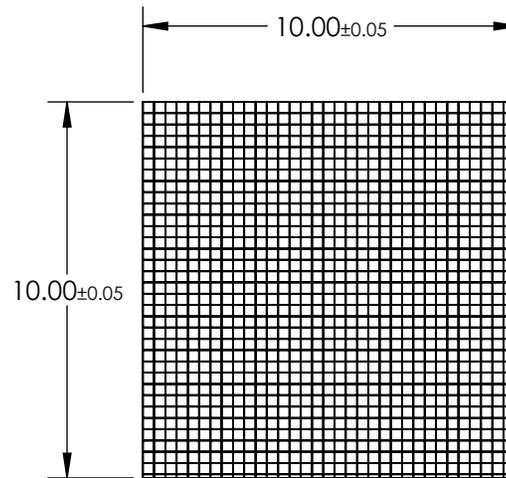

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:
 DO NOT MANUFACTURE
 PARTS TO THIS DRAWING**

EO® Edmund Optics®

THIRD ANGLE PROJECTION		TITLE	Microlens Array 10 x 10mm, 300µm Pitch, 0.5° Divergence, UV-VIS Coated	
ALL DIMS IN	mm	DWG NO	21146	SHEET 1 OF 1