



NOTES:

1. SUBSTRATE:
FUSED SILICA
2. RoHS: COMPLIANT
3. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN < 5 ARCMIN
4. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: VIS-NIR (400-1000nm)
 Rabs ≤ 0.25% @ 880nm Ravg ≤ 1.25% @ 400 - 870nm Ravg ≤ 1.25% @ 890 - 1000nm

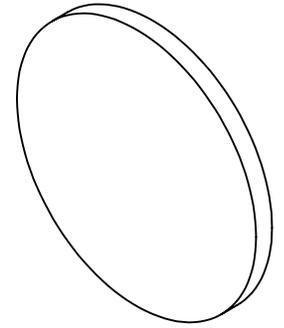

5. FINE GRIND SURFACE

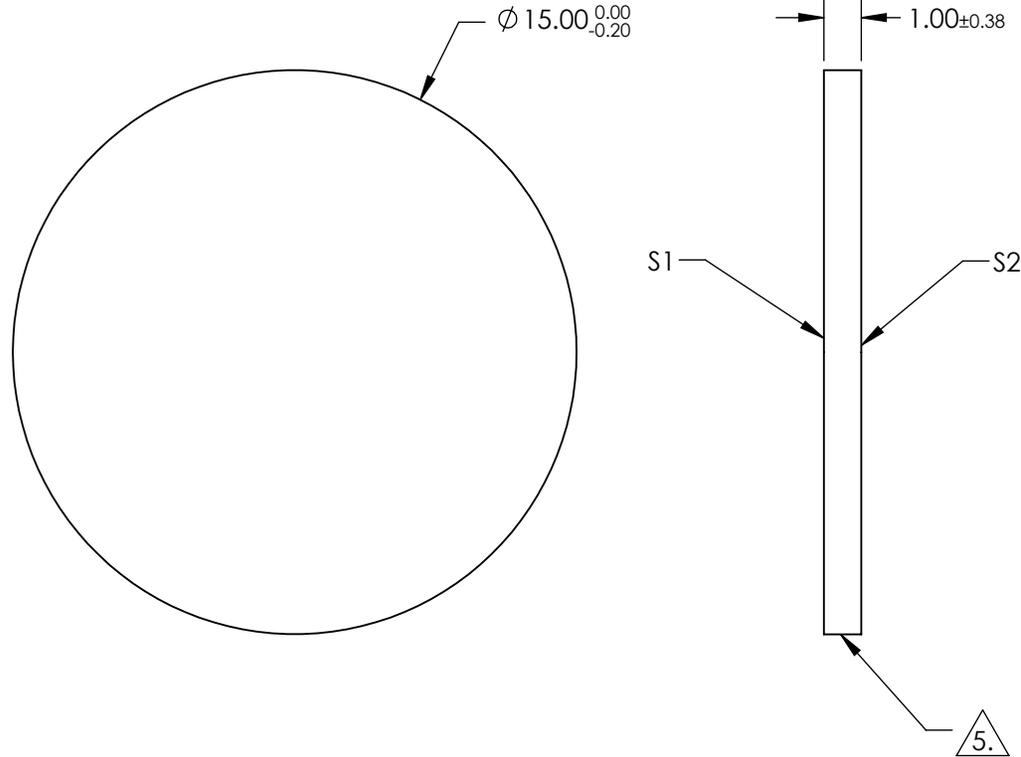

**FOR INFORMATION ONLY:
 DO NOT MANUFACTURE
 PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE ACCURACY	1λ	1λ
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	∅ 13.5	∅ 13.5
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION

ALL DIMS IN mm

EO® Edmund Optics®

TITLE

15mm Dia. 1mm Thick VIS-NIR Coated, 1λ
 Fused Silica Window

DWG NO

23312

SHEET
 12 OF 35