




NOTES:

1. SUBSTRATE:
H-K51
2. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: MgF₂ (400-700nm)
R(AVG) ≤ 1.75% @ 400 - 700nm
3. CENTERING: ≤30 ARCMIN

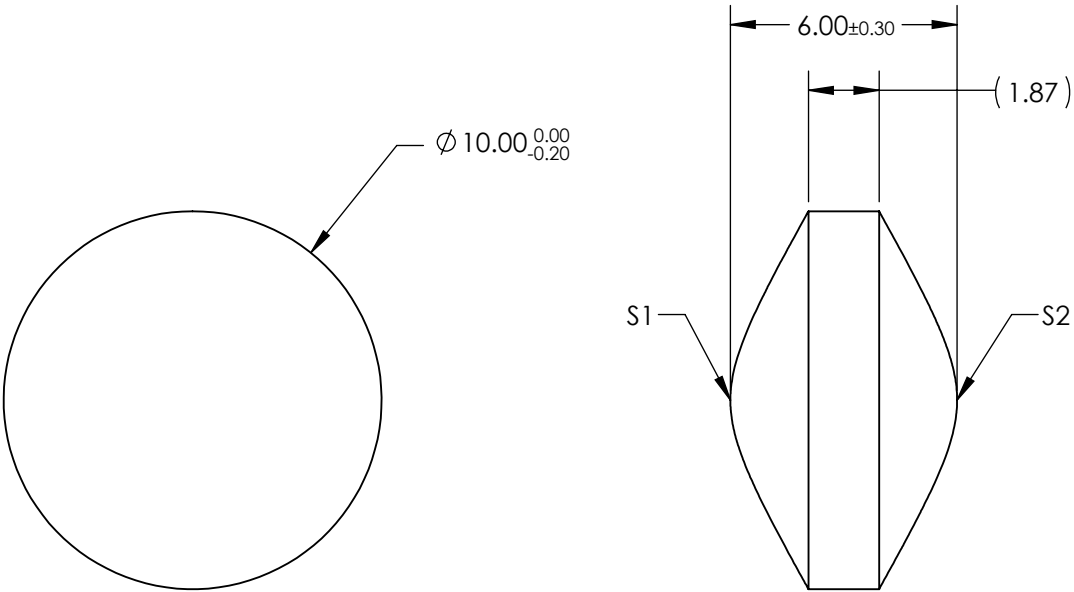

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	EFL @ 587.6nm	4.50	 Edmund Optics ®		
SHAPE	CONVEX	CONVEX	BFL @ 587.6nm	1.65			
SURFACE QUALITY	80-50 (typical)	80-50 (typical)	THIRD ANGLE PROJECTION 	TITLE	10mm Dia. x 4.5mm FL, MgF2 Coated, Aspheric Condenser Lens		
CLEAR APERTURE	Ø 9.00	Ø 9.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	23811	SHEET 1 OF 1