




NOTES:

1. SUBSTRATE:  
H-K9L
2. COATING (APPLY ACROSS CLEAR APERTURE)  
S1 & S2: MgF<sub>2</sub> (400-700nm)  
R(AVG) ≤ 1.75% @ 400 - 700nm
3. CENTERING: ≤30 ARCMIN

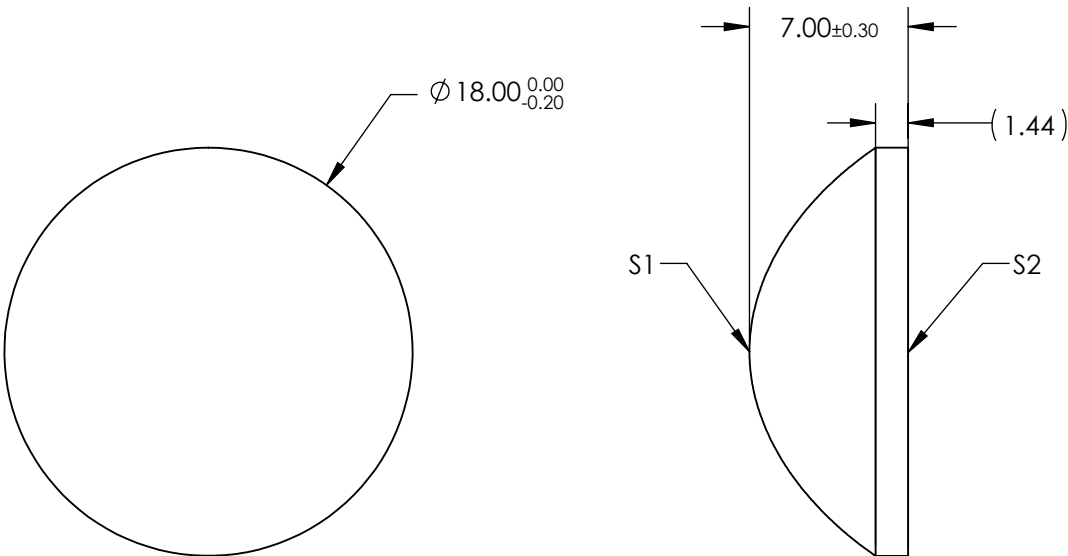

**FOR INFORMATION ONLY:**  
**DO NOT MANUFACTURE**  
**PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	EFL @ 587.6nm	15.50	 <b>Edmund Optics</b> ®		
SHAPE	CONVEX	PLANO	BFL @ 587.6nm	10.87			
SURFACE QUALITY	80-50 (typical)	80-50 (typical)			TITLE	18mm Dia. x 15.5mm FL, MgF2 Coated, Aspheric Condenser Lens	
CLEAR APERTURE	Ø 16.20	Ø 16.20					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	23814	SHEET 1 OF 1