NOTES:


1. SUBSTRATE: Fused Silica (Corning 7980)


2. S2 TO BE PARALLEL WITH S1 TO WITHIN <1 ARCMIN

3. COATING (APPLY ACROSS CLEAR APERTURE) S1& S2: R(ABS) ≤1.0% FROM 250 - 425nm R(AVG) ≤0.75% FROM 250 - 425nm R(AVG) ≤0.5% FROM 370 - 420nm

4. FINE GRIND SURFACE

5. ROHS COMPLIANT



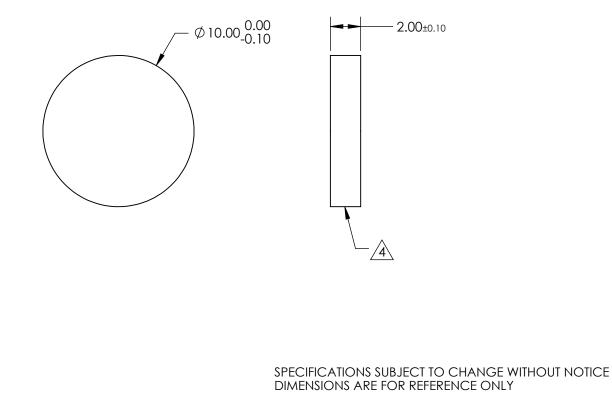

Edmund Optics® S1 S2 PLANO PLANO SHAPE 10mm Dia., 2mm Thick, NIR II Coated, $\lambda/4$ THIRD ANGLE 40-20 40-20 TITLE SURFACE QUALITY **Fused Silica Window** Ø9.00 Ø9.00 CLEAR APERTURE SHEET ALL DIMS IN DWG NO mm PROTECTED AS NEEDED PROTECTED AS NEEDED 25635 BEVEL 3 OF 26

FOR INFORMATION ONL NOT MANUFACTURE PARTS TO THIS DRAWING