
NOTES:


- 1. SUBSTRATE: Fused Silica (Corning 7980)
- 2. S2 TO BE PARALLEL WITH S1 TO WITHIN <1 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) \$1& \$2: R(ABS) ≤1.0% FROM 250 - 425nm R(AVG) ≤0.75% FROM 250 - 425nm R(AVG) ≤0.5% FROM 370 - 420nm

4. FINE GRIND SURFACE

5. ROHS COMPLIANT



6 OF 26

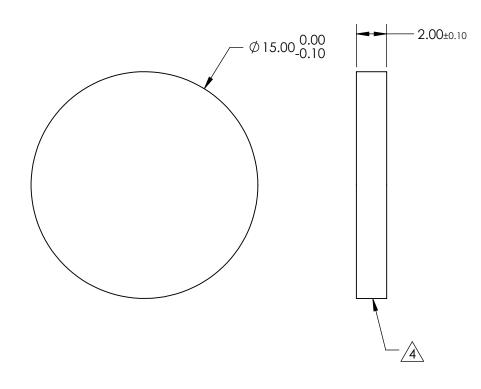

PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2		
SHAPE	PLANO	PLANO		
SURFACE QUALITY	40-20	40-20		
CLEAR APERTURE	Ø13.50	Ø13.50		
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED		
	•	-		

		G	Edmund Optic	S®
THIRD ANGLE PROJECTION	\$	TITLE	15mm Dia., 2mm Thick, NIR II Coated Fused Silica Window	, λ/4
ALL DIMS IN	mm	DWG NO	25639	SHEET 6 OF 26