

## NOTES:

- 1. SUBSTRATE: Fused Silica (Corning 7980)
- 2. S2 TO BE PARALLEL WITH S1 TO WITHIN <1 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) \$1 & \$2: R(ABS) ≤1.0% FROM 250 - 425nm R(AVG) ≤0.75% FROM 250 - 425nm R(AVG) ≤0.5% FROM 370 - 420nm

4. FINE GRIND SURFACE

5. ROHS COMPLIANT



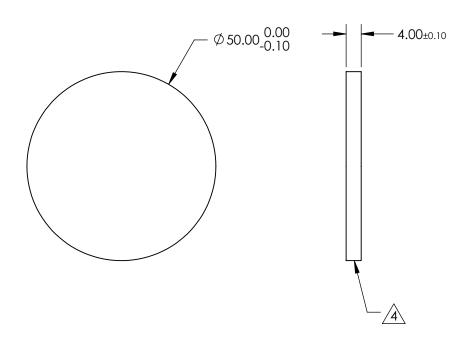

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	Ø45.00	Ø45.00
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED
<u></u>	•	-

		Edmund Optics®		
THIRD ANGLE PROJECTION	50mm Dia., 4mm Thick, NIR II Coated, λ/4 Fused Silica Window		, λ/4	
ALL DIMS IN	mm	DWG NO	25645	SHEET 12 OF 26