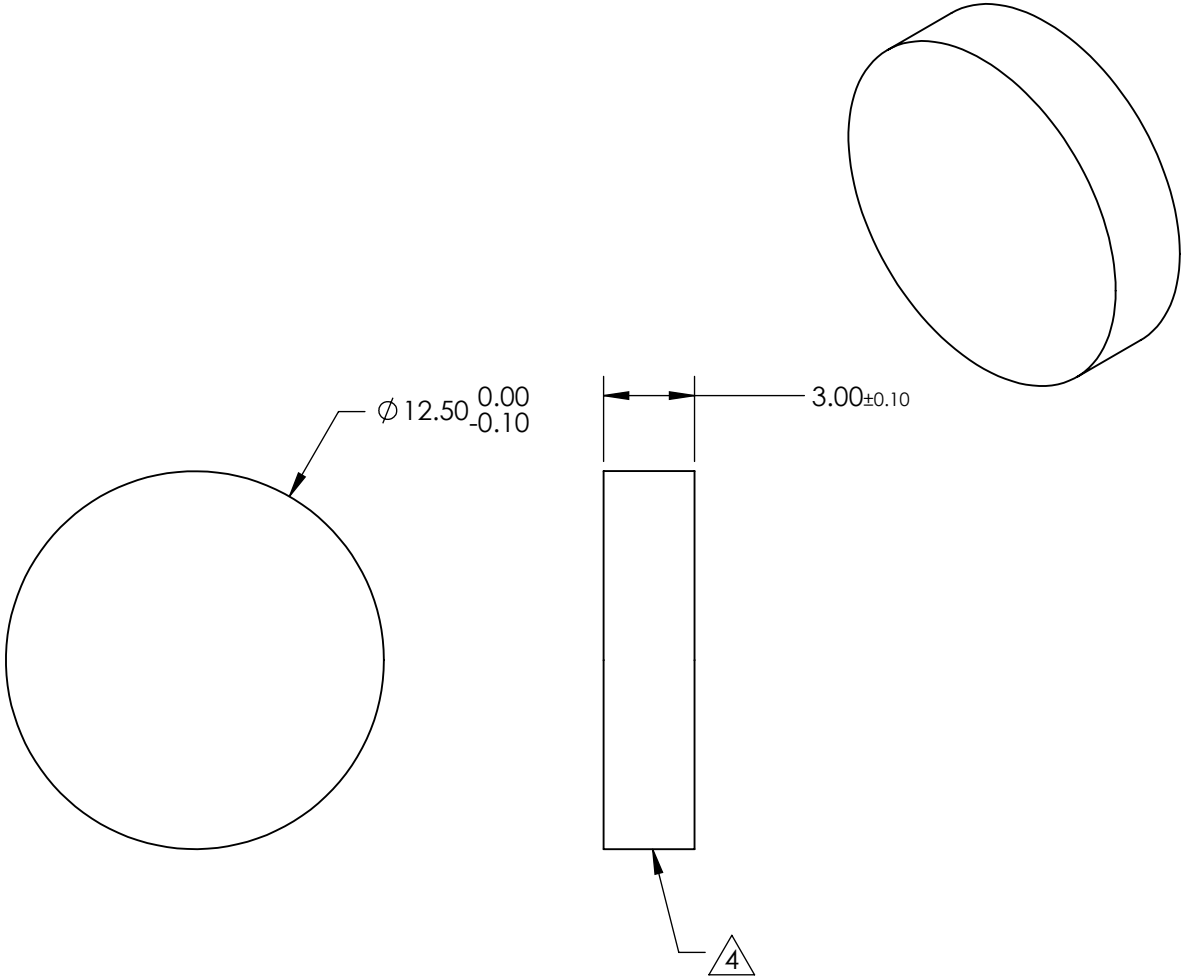


NOTES:



- 1. SUBSTRATE: Fused Silica (Corning 7980)
- 2. S2 TO BE PARALLEL WITH S1 TO WITHIN <1 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE)  
S1 & S2: R(ABS) ≤1.5% FROM 750 - 800nm  
R(ABS) ≤1.0% FROM 800 - 1550nm  
R(AVG) ≤0.7% FROM 750 - 1550nm
- 4. FINE GRIND SURFACE
- 5. ROHS COMPLIANT

4. FINE GRIND SURFACE



**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2			 Edmund Optics®		
SHAPE	PLANO	PLANO	THIRD ANGLE PROJECTION 	TITLE	12.5mm Dia., 3mm Thick, NIR II Coated, λ/4 Fused Silica Window		
SURFACE QUALITY	40-20	40-20					
CLEAR APERTURE	Ø 11.25	Ø 11.25					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	25654	SHEET 18 OF 26