




NOTES:

- 1. SUBSTRATE: N-BK7
- 2. S2 TO BE PARALLEL WITH S1 TO <1 ARCMIN
- 2. COATING (APPLY ACROSS CLEAR APERTURE)

S1&S2: R(ABS) ≤1.5% @ 750 - 800nm  
R(ABS) ≤1.0% @ 800 - 1550nm  
R(ABS) ≤0.7% @ 750 - 1550nm



4. FINE GRIND SURFACE

- 5. ROHS COMPLIANT

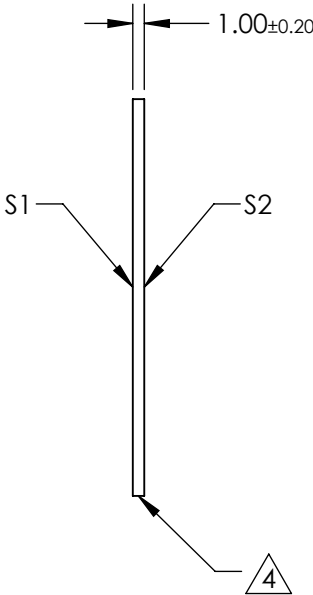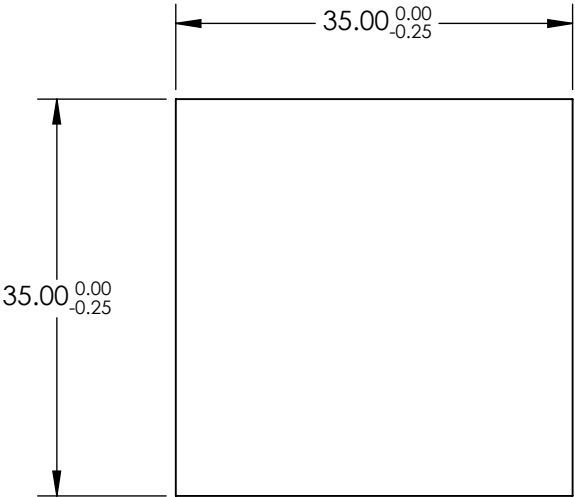

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

|                 |                     |                     |   |        |  |   |  |
|-----------------|---------------------|---------------------|---|--------|--|---|--|
|                 | S1                  | S2                  |   |        |  Edmund Optics® |   |  |
| SHAPE           | PLANO               | PLANO               | <div>THIRD ANGLE<br/>PROJECTION</div>  | TITLE  |  | 35mm Sq., 1mm Thick, NIR II Coated λ/4 N-BK7 Window |  |
| SURFACE QUALITY | 60 - 40             | 60 - 40             |   | DWG NO |  | 25814   |  |
| CLEAR APERTURE  | Ø 31.50 x 31.50     | Ø 31.50 x 31.50     |   |        |  | SHEET<br>8 OF 14                                    |  |
| BEVEL           | PROTECTED AS NEEDED | PROTECTED AS NEEDED | ALL DIMS IN   | mm     |  |   |  |