## NOTES:

SUBSTRATE

Sapphire (Al2O3) Axis Orientation: Random


2. COATING (APPLY ACROSS CLEAR APERTURE) \$1 & \$2: NONE

3. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN ≤3.5 ARCMIN



FINE GRIND SURFACE

Rohs Compliant

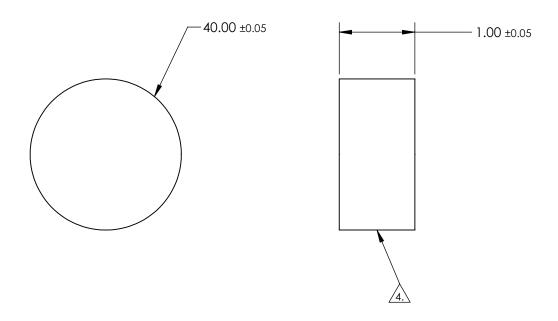

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

SHAPE	\$1 PLANO	\$2 PLANO		B	<b>Edmund Optics</b> ®
SURFACE QUALITY	80 - 50	80 - 50			40mm Dia., 1mm Thick, Uncoated Sapphire
SURFACE FLATNESS	2λ (typical)	2λ (typical)	THIRD ANGLE PROJECTION	TITLE	Window
CLEAR APERTURE	Ø36.00	Ø36.00			
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN mm	DWG NO	25383 SHEET 1 OF 1