
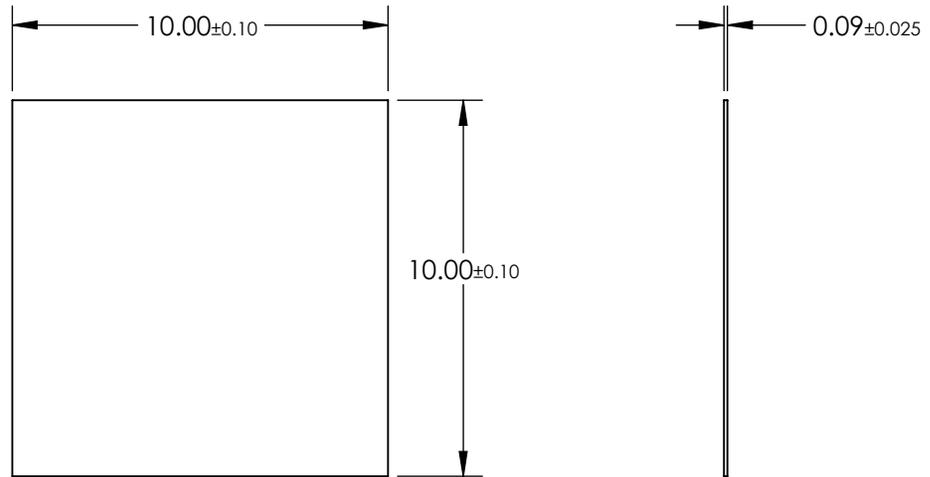


NOTES:

1. SUBSTRATE: SODIUM SILICATE GLASS DOPED WITH SILVER NANOPARTICLES
2. COATING: Single-Side AR
3. TYPICAL ENERGY DENSITY LIMIT: 10 W/cm²
4. EXTINCTION RATIO: >10,000:1
5. WAVELENGTH RANGE: 1260-1360
6. ROHS COMPLIANT

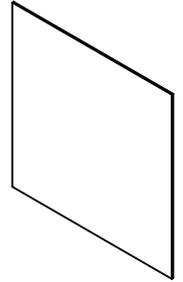

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	40 - 20	40 - 20
TRANSMISSION (%)	>91	>91
ACCEPTANCE ANGLE	±20°	±20°
BEVEL MAX FACE	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

 **Edmund Optics®**

TITLE: Ultra-Thin Polarizer, 1310nm, 10 x 10mm, Single AR

DWG NO: 26638

SHEET 1 OF 6