NOTES:

1. SUBSTRATE:


N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)

S1: INCONEL S2: NONE



- 4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 5. ROHS COMPLIANT

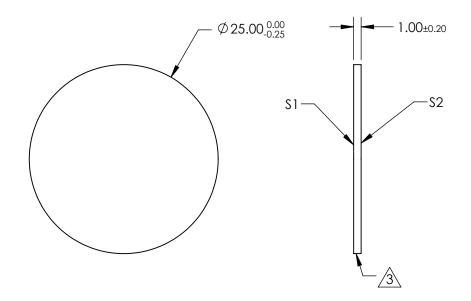

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

|                     |                     |                     | _                      |    |
|---------------------|---------------------|---------------------|------------------------|----|
|                     | \$1                 | S2                  |                        |    |
| SHAPE               | PLANO               | PLANO               |                        | 1  |
| SURFACE QUALITY     | 60 - 40             | 60 - 40             | THIRD ANGLE PROJECTION |    |
| BLOCKING WAVELENGTH | 350 - 1100          | 350 - 1000          |                        | 1  |
| BEVEL               | PROTECTED AS NEEDED | PROTECTED AS NEEDED | ALL DIMS IN            | mm |

|   |                        | <b>Edmund Optics®</b> |        |  |                   |  |
|---|------------------------|-----------------------|--------|--|-------------------|--|
|   | THIRD ANGLE PROJECTION | $\phi \Box$           | TITLE  | 0.9 OD 25mm Diameter, Reflective ND Filter |                   |  |
| D | ALL DIMS IN            | mm                    | DWG NO | 26506                                      | SHEET<br>24 OF 45 |  |