




NOTES:

1. SUBSTRATE:
N-BK7
2. INCIDENT AND REFLECTED BEAMS SHALL BE PARALLEL TO WITHIN 3 ARCSEC
3. COATING (APPLY ACROSS COATING APERTURE)
S1: NONE

S2: NIR II
 $R(AVG) \leq 1.5\% @ 750 - 800nm$
 $R(AVG) \leq 1.0\% @ 800 - 1550nm$
 $R(AVG) \leq 0.7\% @ 750 - 1550nm$

 FINE GRIND SURFACE

5. ROHS: COMPLIANT

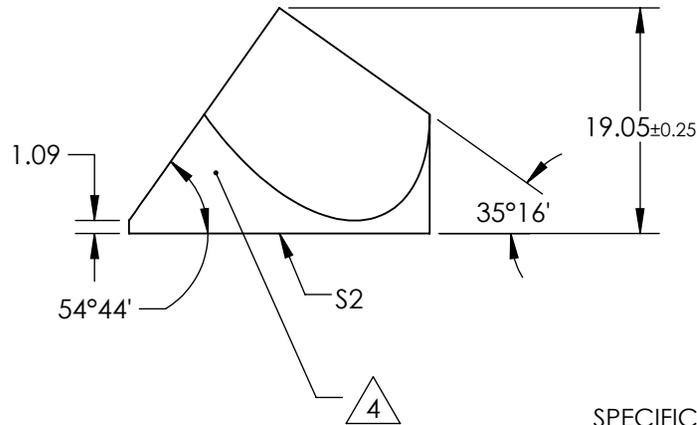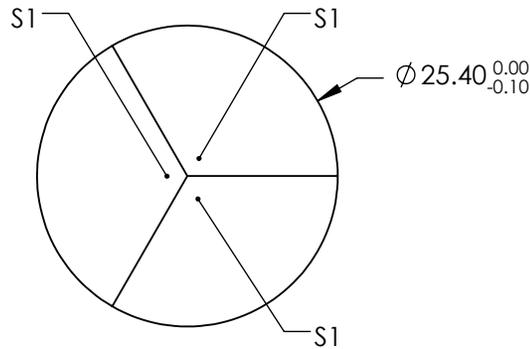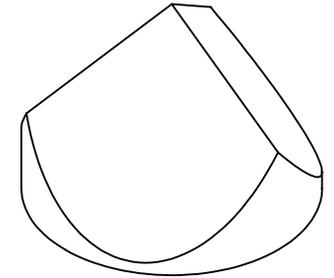


**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

 **Edmund Optics®**

| | |
|------------------|---------------------|
| | S1 & S2 |
| SURFACE FLATNESS | $\lambda/8$ |
| SURFACE QUALITY | 60-40 |
| WAVELENGTH RANGE | 750 - 1550 nm |
| BEVEL | PROTECTED AS NEEDED |

| | |
|------------------------|---|
| THIRD ANGLE PROJECTION |  |
| ALL DIMS IN | mm |

| | |
|--------|---|
| TITLE | 25.4mm NIR II Coated, Corner Cube Prism |
| DWG NO | 26971 |
| SHEET | 1 OF 1 |