




NOTES:

- SUBSTRATE:  
N-BK7
- INCIDENT AND REFLECTED BEAMS SHALL BE PARALLEL TO WITHIN 5 ARCSEC
- COATING (APPLY ACROSS COATING APERTURE)  
S1: NONE

S2: NIR II  
 $R(AVG) \leq 1.5\% @ 750 - 800nm$   
 $R(AVG) \leq 1.0\% @ 800 - 1550nm$   
 $R(AVG) \leq 0.7\% @ 750 - 1550nm$



4. FINE GRIND SURFACE

- ROHS: COMPLIANT

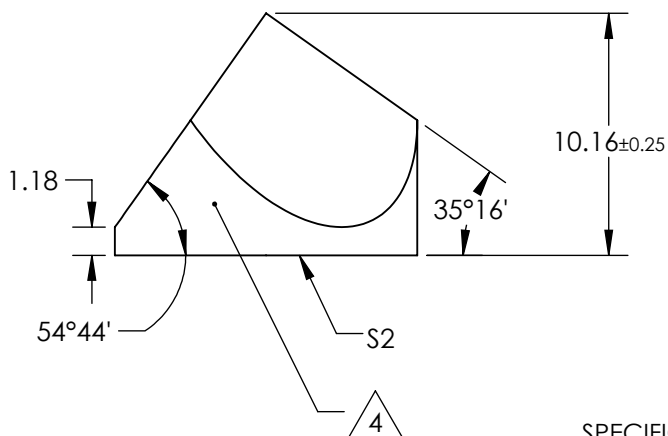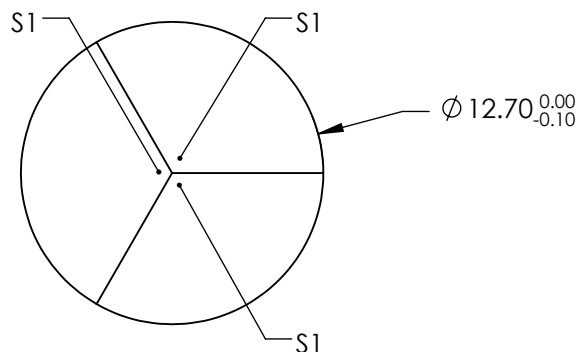

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1 & S2				
SURFACE FLATNESS	$\lambda/8$	THIRD ANGLE PROJECTION 	TITLE	12.7mm NIR II Coated, Corner Cube Prism	
SURFACE QUALITY	60-40		DWG NO	26970	SHEET 1 OF 1
WAVELENGTH RANGE	750 - 1550 nm				
BEVEL	PROTECTED AS NEEDED		ALL DIMS IN	mm	