NOTES:

1. SUBSTRATE: FUSED SILICA


2. COATING (APPLY ACROSS CLEAR APERTURE) \$1 & \$2: NONE



FINE GRIND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. ROHS COMPLIANT

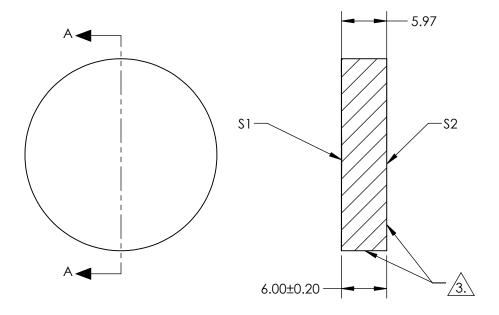

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2				(n)	
SHAPE	CONCAVE	PLANO				Edmund Optic	C®
RADIUS	2500	INFINITY					,S
SURFACE QUALITY	20-10	N/A		1		25.4mm Dia. x 2500mm ROC, Uncoat	ed
CLEAR APERTURE	Ø 22.86	N/A	THIRD ANGLE PROJECTION		TITLE	Concave Laser Mirror	
IRREGULARITY AT 632.8nm	λ/10	N/A				3 3 7 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	011555
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	27581	SHEET 8 OF 21